



PHY 711 Classical Mechanics and Mathematical Methods

10-10:50 AM MWF in Olin 103

Lecture notes for Lecture 6

Physics analyzed in accelerated coordinate frames – Chap 2 F&W

- 1. Angular acceleration**
- 2. Linear and angular acceleration**
- 3. Foucault pendulum**

PHY 711 Classical Mechanics and Mathematical Methods

MWF 10 AM-10:50 AM | OPL 103 | <http://www.wfu.edu/~natalie/f21phy711/>

Instructor: [Natalie Holzwarth](#) | Office: 300 OPL | e-mail: natalie@wfu.edu

Course schedule

(Preliminary schedule -- subject to frequent adjustment.)

	Date	F&W Reading	Topic	Assignment	Due
1	Mon, 8/23/2021	Chap. 1	Introduction	#1	8/27/2021
2	Wed, 8/25/2021	Chap. 1	Scattering theory	#2	8/30/2021
3	Fri, 8/27/2021	Chap. 1	Scattering theory		
4	Mon, 8/30/2021	Chap. 1	Scattering theory	#3	9/01/2021
5	Wed, 9/01/2021	Chap. 1	Summary of scattering theory	#4	9/03/2021
6	Fri, 9/03/2021	Chap. 2	Non-inertial coordinate systems	#5	9/06/2021
7	Wed, 9/09/2021	Chap. 3	Calculus of Variation		

PHY 711 -- Assignment #5

Sept. 3, 2021

Read Chapter 2 in **Fetter & Walecka**.



1. Suppose that you would like to install a Foucault Pendulum at a location of your choice. Find the latitude of your location and determine the period of the pendulum to make a complete circle of the direction of its swing.



Physical laws as described in non-inertial coordinate systems

- Newton's laws are formulated in an inertial frame of reference $\{\hat{\mathbf{e}}_i^0\}$
- For some problems, it is convenient to transform the equations into a non-inertial coordinate system

$$\{\hat{\mathbf{e}}_i(t)\}$$

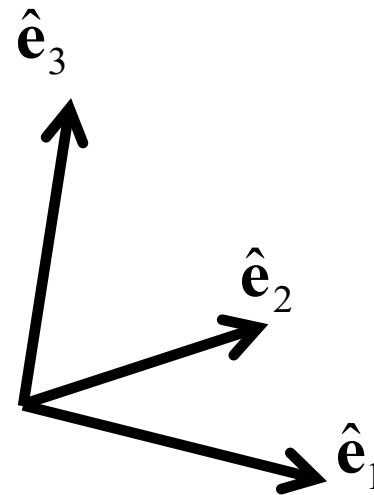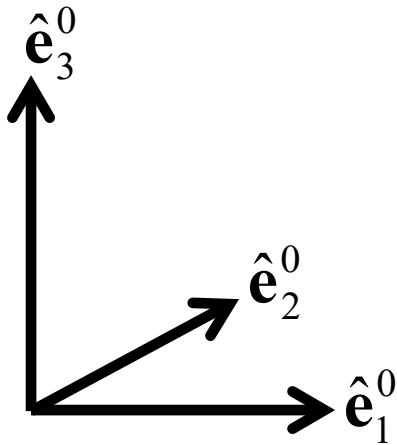



Comparison of analysis in “inertial frame” versus “non-inertial frame”

Denote by $\hat{\mathbf{e}}_i^0$ an fixed coordinate system in 3 orthogonal directions

Denote by $\hat{\mathbf{e}}_i$ a moving coordinate system in 3 orthogonal directions

$$\mathbf{V} = \sum_{i=1}^3 V_i^0 \hat{\mathbf{e}}_i^0 = \sum_{i=1}^3 V_i \hat{\mathbf{e}}_i$$


$$\left(\frac{d\mathbf{V}}{dt} \right)_{inertial} = \sum_{i=1}^3 \frac{dV_i^0}{dt} \hat{\mathbf{e}}_i^0 = \sum_{i=1}^3 \frac{dV_i}{dt} \hat{\mathbf{e}}_i + \sum_{i=1}^3 V_i \frac{d\hat{\mathbf{e}}_i}{dt}$$

Define: $\left(\frac{d\mathbf{V}}{dt} \right)_{body} \equiv \sum_{i=1}^3 \frac{dV_i}{dt} \hat{\mathbf{e}}_i$ **This represents the time rate of change of V measured within the e frame.**

$$\Rightarrow \left(\frac{d\mathbf{V}}{dt} \right)_{inertial} = \left(\frac{d\mathbf{V}}{dt} \right)_{body} + \sum_{i=1}^3 V_i \frac{d\hat{\mathbf{e}}_i}{dt}$$



Properties of the frame motion (rotation only):

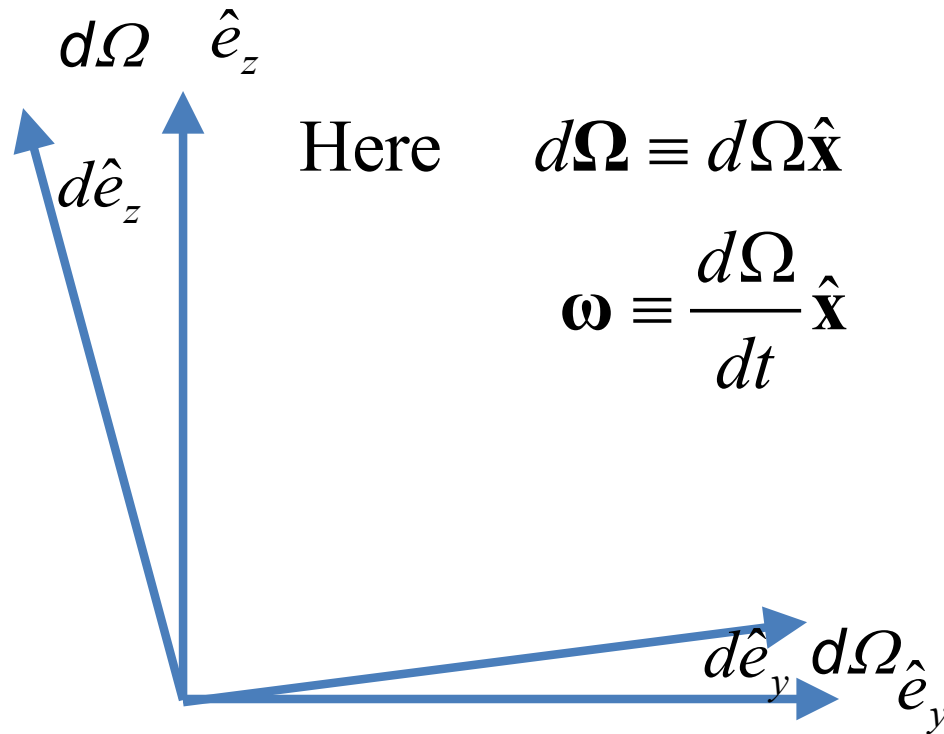

$$d\hat{e}_y = d\mathbf{\Omega} \hat{e}_z$$

$$d\hat{e}_z = -d\mathbf{\Omega} \hat{e}_y$$

$$\Rightarrow d\hat{\mathbf{e}} = d\mathbf{\Omega} \times \hat{\mathbf{e}}$$


$$\frac{d\hat{\mathbf{e}}}{dt} = \frac{d\mathbf{\Omega}}{dt} \times \hat{\mathbf{e}}$$

$$\frac{d\hat{\mathbf{e}}}{dt} = \boldsymbol{\omega} \times \hat{\mathbf{e}}$$

Note that the coordinate $\hat{\mathbf{e}}_x$ is pointing out of the screen.




Properties of the frame motion (rotation only):



$$d\hat{\mathbf{e}} = d\boldsymbol{\Omega} \times \hat{\mathbf{e}} \quad \frac{d\hat{\mathbf{e}}}{dt} = \frac{d\boldsymbol{\Omega}}{dt} \times \hat{\mathbf{e}} \quad \frac{d\hat{\mathbf{e}}}{dt} = \boldsymbol{\omega} \times \hat{\mathbf{e}}$$

Note that $\hat{\mathbf{e}}_x$ is pointing out of the screen.

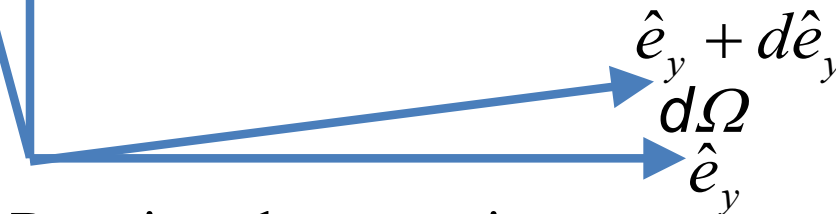

Rotation about x -axis:

rotation
matrix



$$\begin{pmatrix} e_y \\ e_z \end{pmatrix} = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} \begin{pmatrix} e_y \\ e_z \end{pmatrix} \quad \begin{pmatrix} e_y + de_y \\ e_z + de_z \end{pmatrix} = \begin{pmatrix} \cos(d\Omega) & \sin(d\Omega) \\ -\sin(d\Omega) & \cos(d\Omega) \end{pmatrix} \begin{pmatrix} e_y \\ e_z \end{pmatrix}$$

$$\begin{pmatrix} de_y \\ de_z \end{pmatrix} = \begin{pmatrix} \cos(d\Omega) - 1 & \sin(d\Omega) \\ -\sin(d\Omega) & \cos(d\Omega) - 1 \end{pmatrix} \begin{pmatrix} e_y \\ e_z \end{pmatrix} \approx \begin{pmatrix} 0 & d\Omega \\ -d\Omega & 0 \end{pmatrix} \begin{pmatrix} e_y \\ e_z \end{pmatrix}$$

More details

Rotation about x-axis:

$$\begin{pmatrix} e_y \\ e_z \end{pmatrix} = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix} \begin{pmatrix} e_y \\ e_z \end{pmatrix} \quad \begin{pmatrix} e_y + de_y \\ e_z + de_z \end{pmatrix} = \begin{pmatrix} \cos(d\Omega) & \sin(d\Omega) \\ -\sin(d\Omega) & \cos(d\Omega) \end{pmatrix} \begin{pmatrix} e_y \\ e_z \end{pmatrix}$$

$$\begin{pmatrix} de_y \\ de_z \end{pmatrix} = \begin{pmatrix} \cos(d\Omega) - 1 & \sin(d\Omega) \\ -\sin(d\Omega) & \cos(d\Omega) - 1 \end{pmatrix} \begin{pmatrix} e_y \\ e_z \end{pmatrix} \approx \begin{pmatrix} 0 & d\Omega \\ -d\Omega & 0 \end{pmatrix} \begin{pmatrix} e_y \\ e_z \end{pmatrix}$$

$$e_y + de_y = \cos(d\Omega)e_y + \sin(d\Omega)e_z$$

$$e_z + de_z = -\sin(d\Omega)e_y + \cos(d\Omega)e_z$$


Taylor's series

$$f(x_0 + dx) = f(x_0) + dx \left. \frac{df}{dx} \right|_{x_0} + \frac{1}{2} (dx)^2 \left. \frac{d^2 f}{dx^2} \right|_{x_0} + \dots$$

$$\sin(dx) = dx - \frac{1}{6} (dx)^3 \dots \approx dx \quad \cos(dx) = 1 - \frac{1}{2} (dx)^2 \dots \approx 1$$



Properties of the frame motion (rotation only):

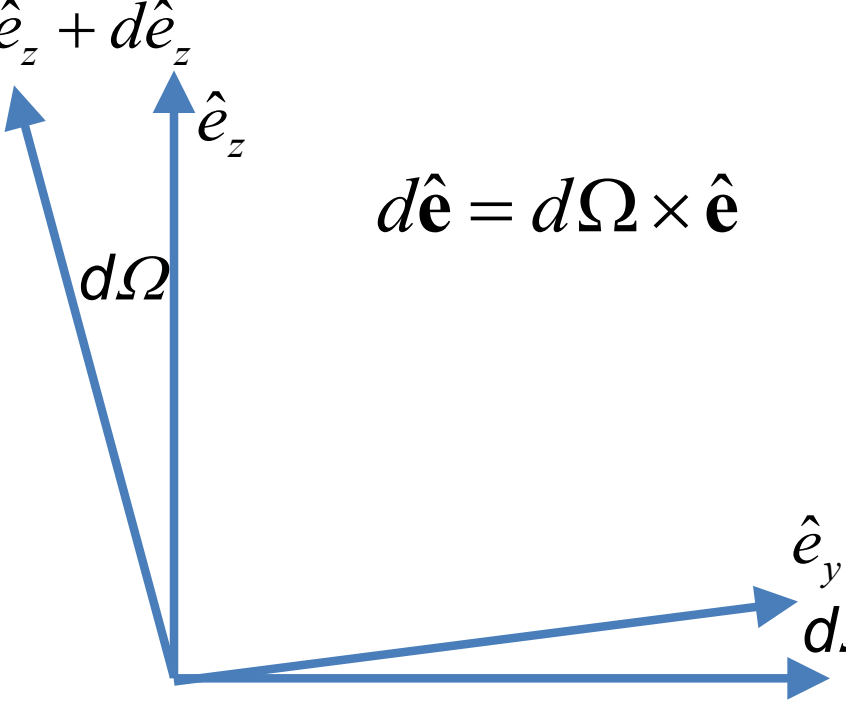

$$d\hat{\mathbf{e}} = d\boldsymbol{\Omega} \times \hat{\mathbf{e}} \quad \frac{d\hat{\mathbf{e}}}{dt} = \frac{d\boldsymbol{\Omega}}{dt} \times \hat{\mathbf{e}} \quad \frac{d\hat{\mathbf{e}}}{dt} = \boldsymbol{\omega} \times \hat{\mathbf{e}}$$

Rotation about x-axis:

$$\begin{pmatrix} de_y \\ de_z \end{pmatrix} \approx \begin{pmatrix} 0 & d\Omega \\ -d\Omega & 0 \end{pmatrix} \begin{pmatrix} e_y \\ e_z \end{pmatrix} = d\Omega e_z \hat{\mathbf{y}} - d\Omega e_y \hat{\mathbf{z}} = d\Omega \hat{\mathbf{x}} \times \hat{\mathbf{e}}$$

Define axial vectors $\mathbf{d}\boldsymbol{\Omega} \equiv d\Omega \hat{\mathbf{x}}$ also $\boldsymbol{\omega} = \omega \hat{\mathbf{x}}$



Properties of the frame motion (rotation only) -- continued

$$\left(\frac{d\mathbf{V}}{dt}\right)_{inertial} = \left(\frac{d\mathbf{V}}{dt}\right)_{body} + \sum_{i=1}^3 V_i \frac{d\hat{\mathbf{e}}_i}{dt}$$

$$\left(\frac{d\mathbf{V}}{dt}\right)_{inertial} = \left(\frac{d\mathbf{V}}{dt}\right)_{body} + \boldsymbol{\omega} \times \mathbf{V} = \left(\left(\frac{d}{dt}\right)_{body} + \boldsymbol{\omega} \times \right) \mathbf{V}$$

Effects on 2nd time derivative -- acceleration (rotation only):

$$\left(\frac{d}{dt} \frac{d\mathbf{V}}{dt}\right)_{inertial} = \left(\left(\frac{d}{dt}\right)_{body} + \boldsymbol{\omega} \times \right) \left\{ \left(\frac{d\mathbf{V}}{dt}\right)_{body} + \boldsymbol{\omega} \times \mathbf{V} \right\}$$

$$\left(\frac{d^2\mathbf{V}}{dt^2}\right)_{inertial} = \left(\frac{d^2\mathbf{V}}{dt^2}\right)_{body} + 2\boldsymbol{\omega} \times \left(\frac{d\mathbf{V}}{dt}\right)_{body} + \frac{d\boldsymbol{\omega}}{dt} \times \mathbf{V} + \boldsymbol{\omega} \times \boldsymbol{\omega} \times \mathbf{V}$$

Application of Newton's laws in a coordinate system which has an angular velocity $\boldsymbol{\omega}$ and linear acceleration $\mathbf{a}$
(Here we generalize previous case to add linear acceleration $\mathbf{a}$.)

Newton's laws; Let $\mathbf{r}$ denote the position of particle of mass m :

$$m \left(\frac{d^2 \mathbf{r}}{dt^2} \right)_{inertial} = \mathbf{F}_{ext}$$

$$m \left(\frac{d^2 \mathbf{r}}{dt^2} \right)_{inertial} = m \left(\mathbf{a} + \left(\frac{d^2 \mathbf{r}}{dt^2} \right)_{body} + 2\boldsymbol{\omega} \times \left(\frac{d\mathbf{r}}{dt} \right)_{body} + \frac{d\boldsymbol{\omega}}{dt} \times \mathbf{r} + \boldsymbol{\omega} \times \boldsymbol{\omega} \times \mathbf{r} \right) = \mathbf{F}_{ext}$$

Rearranging to find the effective acceleration within the non-inertial frame --

$$m \left(\frac{d^2 \mathbf{r}}{dt^2} \right)_{body} = \mathbf{F}_{ext} - m\mathbf{a} - 2m\boldsymbol{\omega} \times \left(\frac{d\mathbf{r}}{dt} \right)_{body} - m \frac{d\boldsymbol{\omega}}{dt} \times \mathbf{r} - m\boldsymbol{\omega} \times \boldsymbol{\omega} \times \mathbf{r}$$


Coriolis
force



Centrifugal
force

Have you every experienced any of these “fictitious” forces?

Examples –

1. Playing on a swing
2. Playing on a merry-go-round
3. Riding on a roller coaster
4. Sitting on the surface of the earth
5. Astronaut aboard the International Space Station
6. ???

Motion on the surface of the Earth:

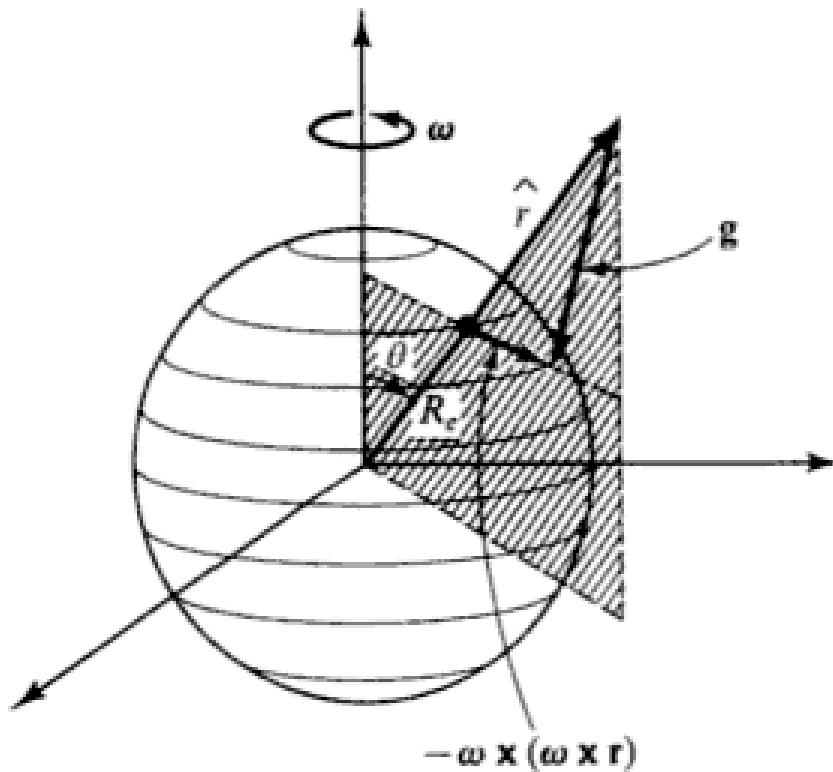

$$\omega = \frac{2\pi}{\tau} \approx 7.3 \times 10^{-5} \text{ rad/s}$$

$$\mathbf{F}_{ext} = -\frac{GM_e m}{r^2} \hat{\mathbf{r}} + \mathbf{F}'$$

Earth's gravity

Support force

Main contributions:

$$m \left(\frac{d^2 \mathbf{r}}{dt^2} \right)_{earth} = -\frac{GM_e m}{r^2} \hat{\mathbf{r}} + \mathbf{F}' - 2m\boldsymbol{\omega} \times \left(\frac{d\mathbf{r}}{dt} \right)_{earth} - m \frac{d\boldsymbol{\omega}}{dt} \times \mathbf{r} - m\boldsymbol{\omega} \times \boldsymbol{\omega} \times \mathbf{r}$$

Non-inertial effects on effective gravitational “constant”

$$m \left(\frac{d^2 \mathbf{r}}{dt^2} \right)_{\text{earth}} = -\frac{GM_e m}{r^2} \hat{\mathbf{r}} + \mathbf{F}' - 2m\boldsymbol{\omega} \times \left(\frac{d\mathbf{r}}{dt} \right)_{\text{earth}} - m \frac{d\boldsymbol{\omega}}{dt} \times \mathbf{r} - m\boldsymbol{\omega} \times \boldsymbol{\omega} \times \mathbf{r}$$

$$\text{For } \left(\frac{d\mathbf{r}}{dt} \right)_{\text{earth}} = 0 \quad \text{and} \quad \left(\frac{d^2 \mathbf{r}}{dt^2} \right)_{\text{earth}} = 0,$$


$$0 = -\frac{GM_e m}{r^2} \hat{\mathbf{r}} + \mathbf{F}' - m\boldsymbol{\omega} \times \boldsymbol{\omega} \times \mathbf{r}$$

$$\mathbf{F}' = -m\mathbf{g}$$

$$\Rightarrow \mathbf{g} = -\frac{GM_e}{r^2} \hat{\mathbf{r}} - \boldsymbol{\omega} \times \boldsymbol{\omega} \times \mathbf{r} \Big|_{r \approx R_e}$$

$$= \left(-\frac{GM_e}{R_e^2} + \omega^2 R_e \sin^2 \theta \right) \hat{\mathbf{r}} + \sin \theta \cos \theta \omega^2 R_e \hat{\boldsymbol{\theta}}$$

$$\begin{array}{c} \uparrow \qquad \qquad \uparrow \\ 9.80 \text{ m/s}^2 \quad 0.03 \text{ m/s}^2 \end{array}$$

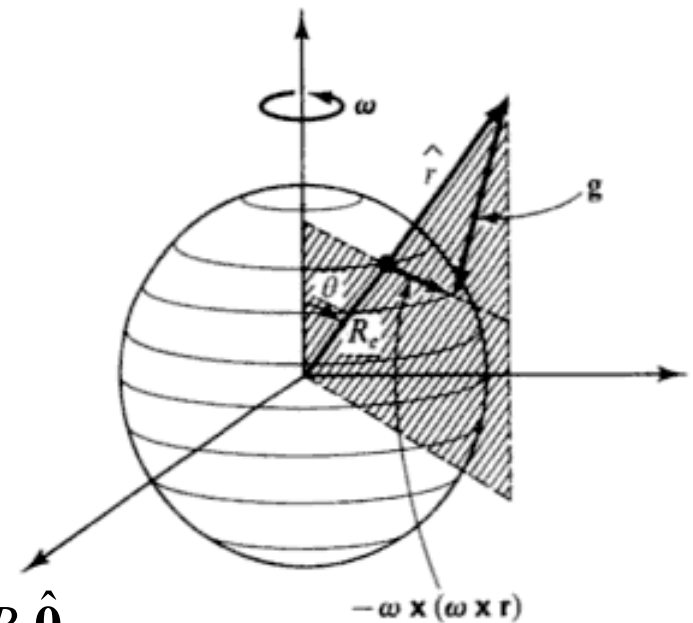

Note that in the previous analysis we left out the term $-m \frac{d\boldsymbol{\omega}}{dt} \times \mathbf{r}$

Is this justified?

1. Yes
2. No



Foucault pendulum



http://www.si.edu/Encyclopedia_SI/nmah/pendulum.htm



The Foucault pendulum was displayed for many years in the Smithsonian's National Museum of American History. It is named for the French physicist Jean Foucault who first used it in 1851 to demonstrate the rotation of the earth.

Equation of motion on Earth's surface


$$m \left(\frac{d^2 \mathbf{r}}{dt^2} \right)_{\text{earth}} = -\frac{GM_e m}{r^2} \hat{\mathbf{r}} + \mathbf{F}' - 2m\boldsymbol{\omega} \times \left(\frac{d\mathbf{r}}{dt} \right)_{\text{earth}} - m \frac{d\boldsymbol{\omega}}{dt} \times \mathbf{r} - m\boldsymbol{\omega} \times \boldsymbol{\omega} \times \mathbf{r}$$

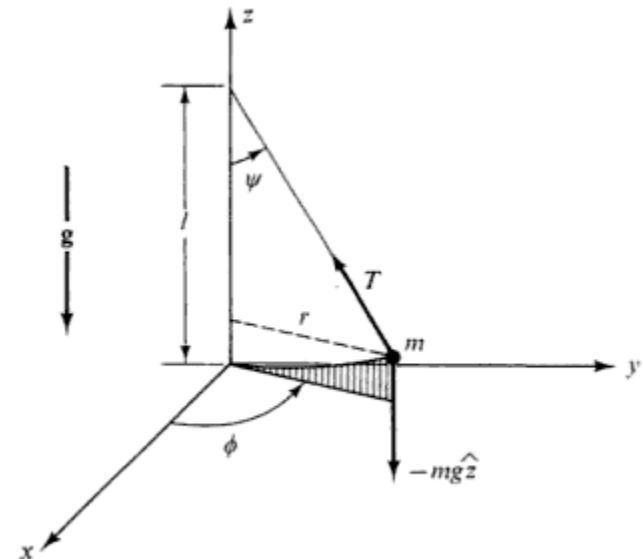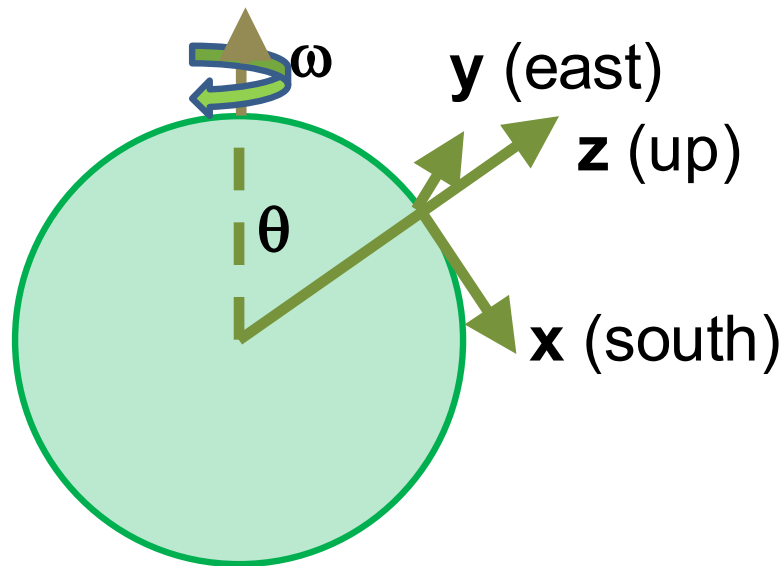

$$\boldsymbol{\omega} \approx -\omega \sin \theta \hat{\mathbf{x}} + \omega \cos \theta \hat{\mathbf{z}}$$



Foucault pendulum continued – keeping leading terms:

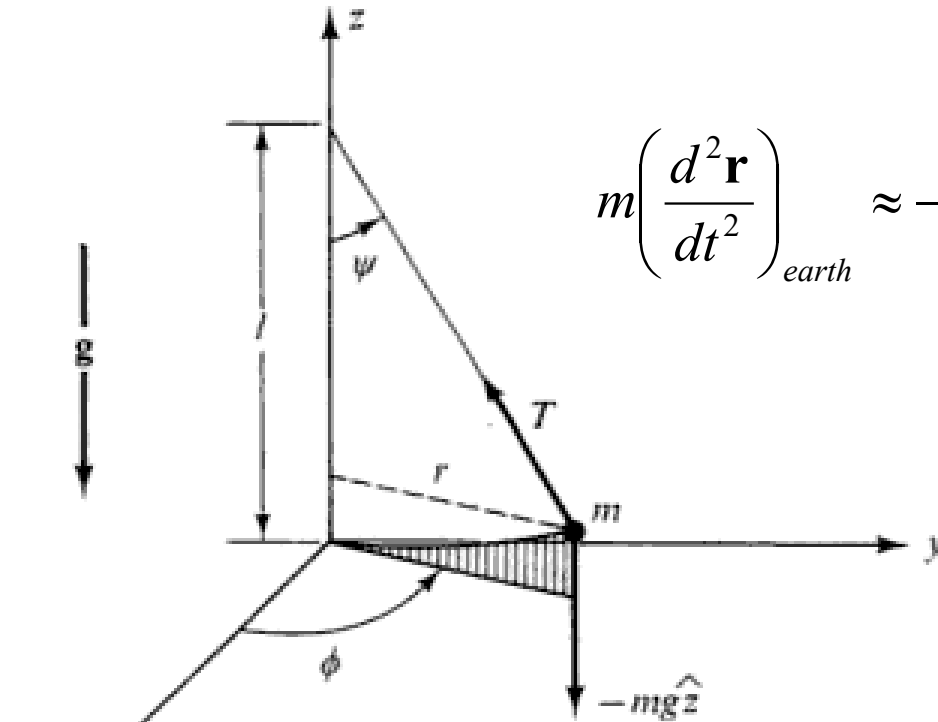

$$m \left(\frac{d^2 \mathbf{r}}{dt^2} \right)_{\text{earth}} \approx -\frac{GM_e m}{R_e^2} \hat{\mathbf{r}} + \mathbf{F}' - 2m \boldsymbol{\omega} \times \left(\frac{d\mathbf{r}}{dt} \right)_{\text{earth}}$$

$$-\frac{GM_e m}{r^2} \hat{\mathbf{r}} \approx -mg \hat{\mathbf{z}}$$

$$\mathbf{F}' \approx -T \sin \psi \cos \phi \hat{\mathbf{x}} - T \sin \psi \sin \phi \hat{\mathbf{y}} + T \cos \psi \hat{\mathbf{z}}$$

$$\boldsymbol{\omega} \approx -\omega \sin \theta \hat{\mathbf{x}} + \omega \cos \theta \hat{\mathbf{z}}$$

$$\boldsymbol{\omega} \times \left(\frac{d\mathbf{r}}{dt} \right)_{\text{earth}} \approx \omega (-\dot{y} \cos \theta \hat{\mathbf{x}} + (\dot{x} \cos \theta + \dot{z} \sin \theta) \hat{\mathbf{y}} - \dot{y} \sin \theta \hat{\mathbf{z}})$$



Foucault pendulum continued – keeping leading terms:

$$m \left(\frac{d^2 \mathbf{r}}{dt^2} \right)_{\text{earth}} \approx -\frac{GM_e m}{R_e^2} \hat{\mathbf{r}} + \mathbf{F}' - 2m\boldsymbol{\omega} \times \left(\frac{d\mathbf{r}}{dt} \right)_{\text{earth}}$$

$$m\ddot{x} \approx -T \sin \psi \cos \phi + 2m\omega \dot{y} \cos \theta$$

$$m\ddot{y} \approx -T \sin \psi \sin \phi - 2m\omega (\dot{x} \cos \theta + \dot{z} \sin \theta)$$

$$m\ddot{z} \approx T \cos \psi - mg + 2m\omega \dot{y} \sin \theta$$

Further approximation :

$$\psi \ll 1; \quad \ddot{z} \approx 0; \quad T \approx mg$$

$$m\ddot{x} \approx -mg \sin \psi \cos \phi + 2m\omega \dot{y} \cos \theta$$


$$m\ddot{y} \approx -mg \sin \psi \sin \phi - 2m\omega \dot{x} \cos \theta$$

Also note that :

$$x \approx \ell \sin \psi \cos \phi$$

$$y \approx \ell \sin \psi \sin \phi$$

ℓ denotes the length of the rope/wire

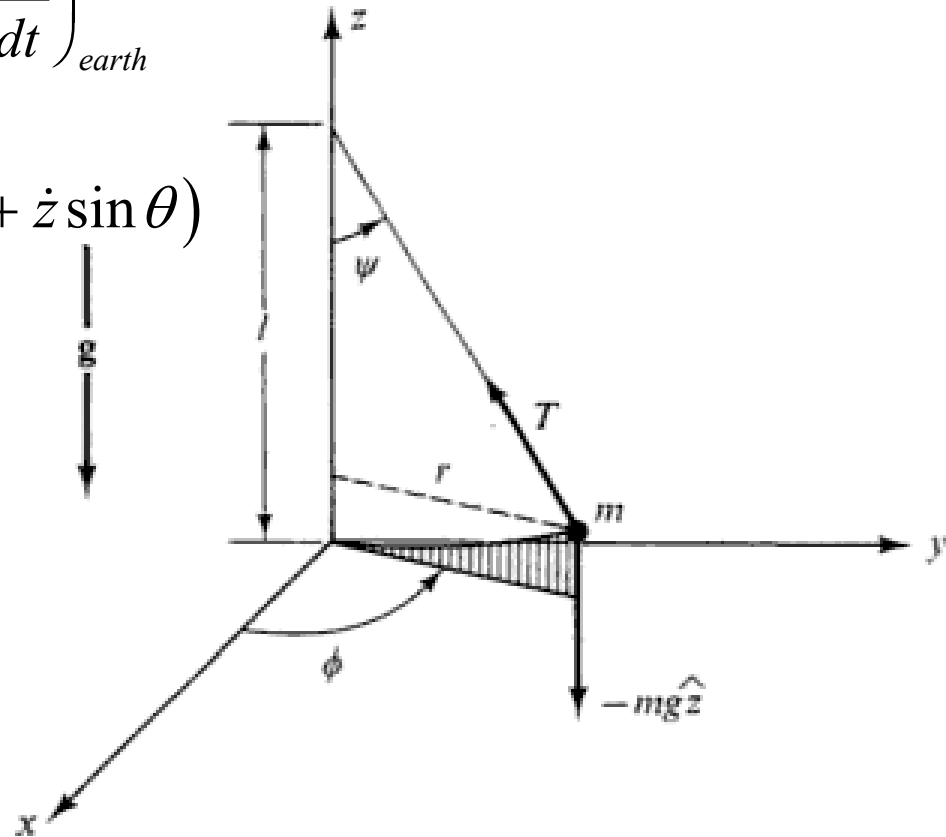



Foucault pendulum continued – coupled equations:

$$\ddot{x} \approx -\frac{g}{\ell} x + 2\omega \cos \theta \dot{y}$$

$$\ddot{y} \approx -\frac{g}{\ell} y - 2\omega \cos \theta \dot{x}$$

Try to find a solution of the form :


$$x(t) = X e^{-iqt} \quad y(t) = Y e^{-iqt}$$

Denote $\omega_{\perp} \equiv \omega \cos \theta$

$$\begin{pmatrix} -q^2 + \frac{g}{\ell} & i2\omega_{\perp}q \\ -i2\omega_{\perp}q & -q^2 + \frac{g}{\ell} \end{pmatrix} \begin{pmatrix} X \\ Y \end{pmatrix} = 0$$

Non - trivial solutions :

$$q_{\pm} = \alpha \pm \beta \equiv \omega_{\perp} \pm \sqrt{\omega_{\perp}^2 + \frac{g}{\ell}}$$

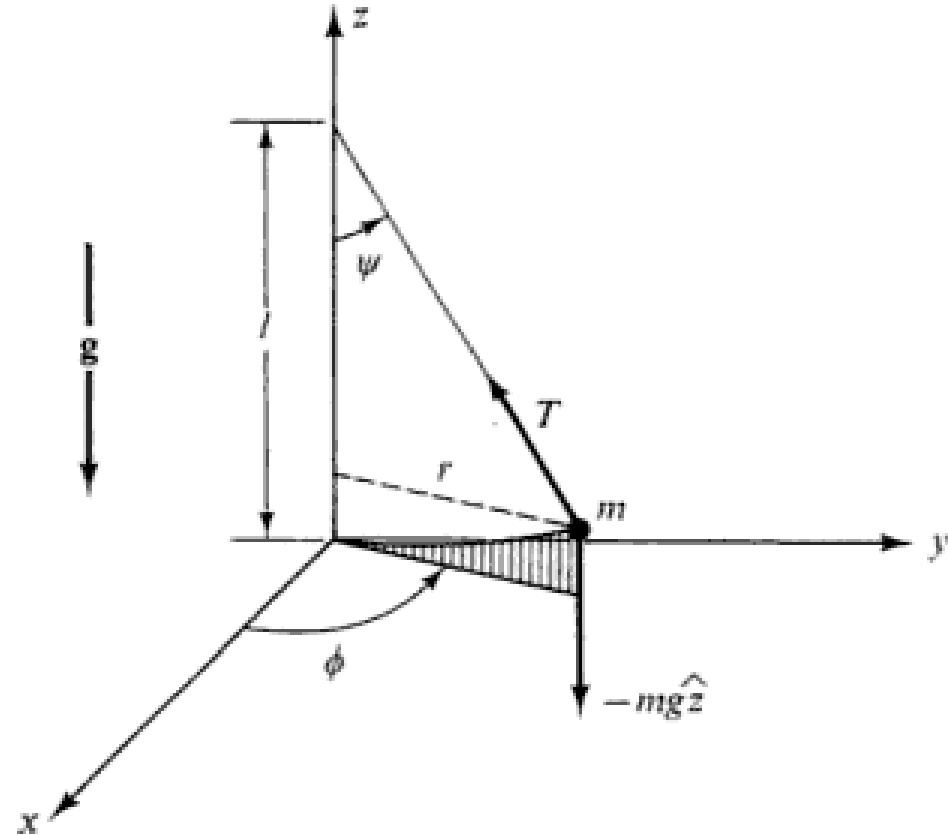



Foucault pendulum continued – coupled equations:

Solution continued :


$$x(t) = Xe^{-iqt} \quad y(t) = Ye^{-iqt}$$

$$\begin{pmatrix} -q^2 + \frac{g}{\ell} & i2\omega_{\perp}q \\ -i2\omega_{\perp}q & -q^2 + \frac{g}{\ell} \end{pmatrix} \begin{pmatrix} X \\ Y \end{pmatrix} = 0$$

Non - trivial solutions :

$$q_{\pm} = \alpha \pm \beta \equiv \omega_{\perp} \pm \sqrt{\omega_{\perp}^2 + \frac{g}{\ell}}$$

Amplitude relationship : $X = iY$

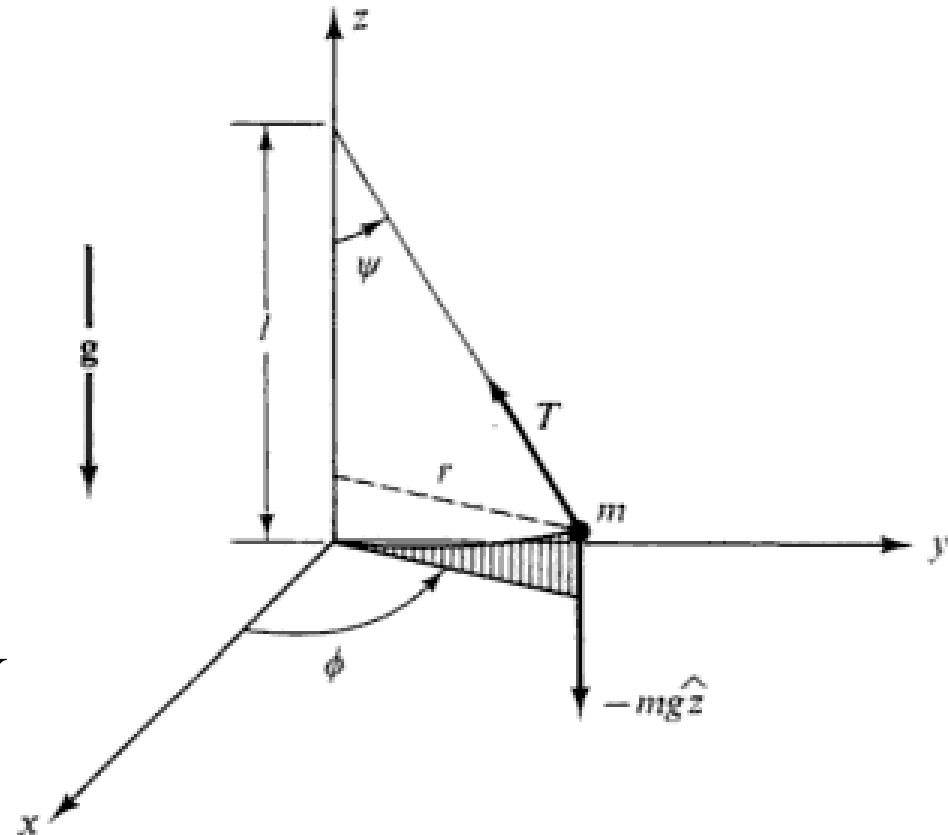

General solution with complex amplitudes C and D :

$$x(t) = \text{Re}\{iCe^{-i(\alpha+\beta)t} + iDe^{-i(\alpha-\beta)t}\}$$

$$y(t) = \text{Re}\{Ce^{-i(\alpha+\beta)t} + De^{-i(\alpha-\beta)t}\}$$




General solution with complex amplitudes C and D :

$$x(t) = \text{Re}\{iCe^{-i(\alpha+\beta)t} + iDe^{-i(\alpha-\beta)t}\}$$

$$y(t) = \text{Re}\{Ce^{-i(\alpha+\beta)t} + De^{-i(\alpha-\beta)t}\}$$

$$q_{\pm} = \alpha \pm \beta \equiv \omega_{\perp} \pm \sqrt{\omega_{\perp}^2 + \frac{g}{\ell}} \approx \omega_{\perp} \pm \sqrt{\frac{g}{\ell}}$$

since $\omega_{\perp} \approx 7 \times 10^{-5} \cos \theta \text{ rad} / \text{s} \ll \sqrt{\frac{g}{\ell}}$

Suppose : $x(0) = X_0$  $y(0) = 0$

$$x(t) = X_0 \cos\left(\sqrt{\frac{g}{\ell}}t\right) \cos(\omega_{\perp}t)$$

Note that

$$\omega = \frac{2\pi}{24 \cdot 3600 \text{ s}} = 7 \times 10^{-5} \text{ rad/sec}$$

$$y(t) = -X_0 \cos\left(\sqrt{\frac{g}{\ell}}t\right) \sin(\omega_{\perp}t)$$


Summary of approximate solution for Foucault pendulum:



Suppose: $x(0) = X_0$ $y(0) = 0$

$$x(t) = X_0 \cos\left(\sqrt{\frac{g}{\ell}}t\right) \cos(\omega_{\perp}t)$$

$$y(t) = -X_0 \cos\left(\sqrt{\frac{g}{\ell}}t\right) \sin(\omega_{\perp}t)$$

$$\omega_{\perp} \equiv \omega_0 \cos \theta$$

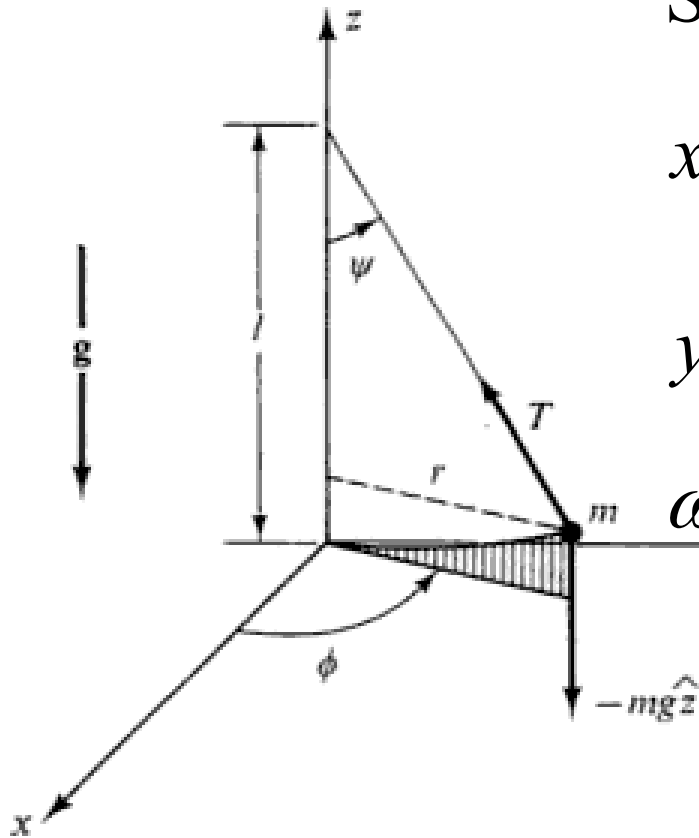

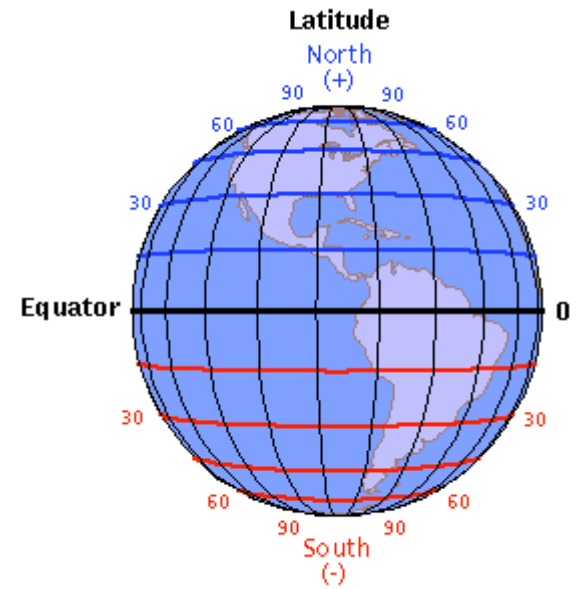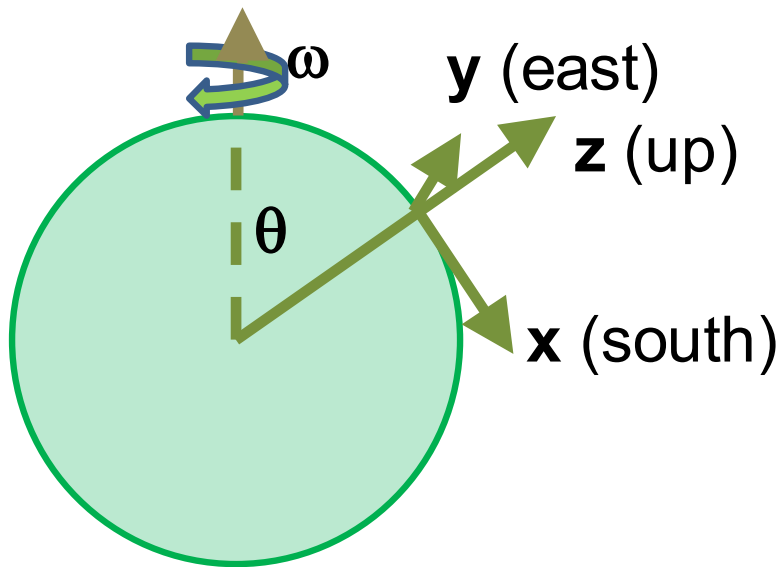

Microsoft Illustration

$$\omega_{\perp} \equiv \omega_0 \cos \theta$$

$$x(t) = X_0 \cos\left(\sqrt{\frac{g}{\ell}}t\right) \cos(\omega_{\perp}t)$$


$$y(t) = -X_0 \cos\left(\sqrt{\frac{g}{\ell}}t\right) \sin(\omega_{\perp}t)$$

Latitude and Longitude

<https://www.latlong.net/>

Latitude and Longitude Finder

Latitude and Longitude are the units that represent the *coordinates at geographic coordinate system*. To make a search, use the name of a place, city, state, or address, or click the location on the map to **find lat long coordinates**.

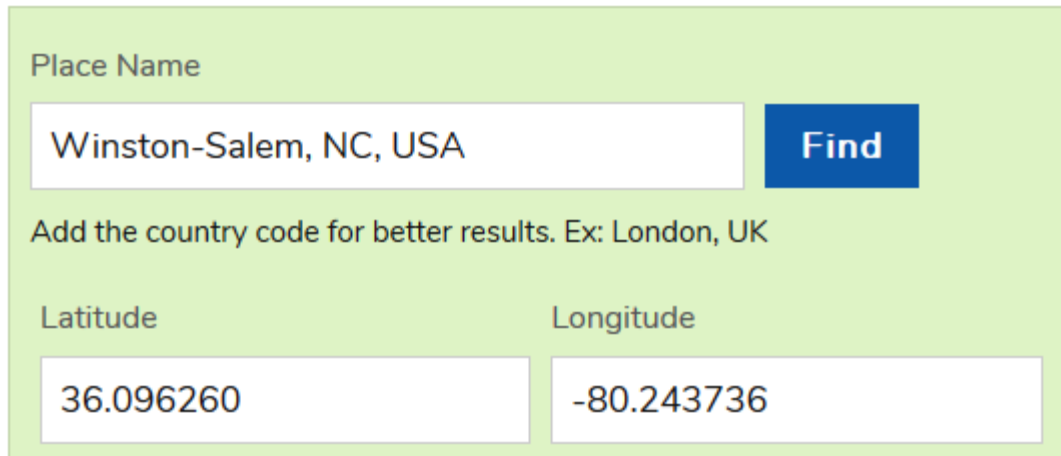

The screenshot shows a web interface for finding latitude and longitude. It has a light green background. At the top, it says "Place Name" above a text input field containing "Winston-Salem, NC, USA". To the right of the input field is a blue button labeled "Find". Below the input field, it says "Add the country code for better results. Ex: London, UK". At the bottom, there are two text input fields. The left one is labeled "Latitude" and contains the value "36.096260". The right one is labeled "Longitude" and contains the value "-80.243736".

Note that $\theta = 90^\circ - \text{Latitude}$