



# **PHY 711 Classical Mechanics and Mathematical Methods**

**10-10:50 AM MWF in Olin 103**

## **Discussion of Lecture 9 – Chap. 3 F & W**

### **Calculus of variation applied to classical mechanics**

- 1. Hamilton's principle**
- 2. D'Alembert's principle**
- 3. Lagrange's equation in generalized coordinates**



# Course schedule

(Preliminary schedule -- subject to frequent adjustment.)

|    | Date           | F&W Reading | Topic                           | Assignment         | Due       |
|----|----------------|-------------|---------------------------------|--------------------|-----------|
| 1  | Mon, 8/22/2022 |             | Introduction                    | <a href="#">#1</a> | 8/26/2022 |
| 2  | Wed, 8/24/2022 | Chap. 1     | Scattering theory               |                    |           |
| 3  | Fri, 8/26/2022 | Chap. 1     | Scattering theory               | <a href="#">#2</a> | 8/29/2022 |
| 4  | Mon, 8/29/2022 | Chap. 1     | Scattering theory               | <a href="#">#3</a> | 8/31/2022 |
| 5  | Wed, 8/31/2022 | Chap. 1     | Summary of scattering theory    | <a href="#">#4</a> | 9/02/2022 |
| 6  | Fri, 9/02/2022 | Chap. 2     | Non-inertial coordinate systems | <a href="#">#5</a> | 9/05/2022 |
| 7  | Mon, 9/05/2022 | Chap. 3     | Calculus of Variation           | <a href="#">#6</a> | 9/7/2022  |
| 8  | Wed, 9/07/2022 | Chap. 3     | Calculus of Variation           | <a href="#">#7</a> | 9/9/2022  |
| 9  | Fri, 9/09/2022 | Chap. 3 & 6 | Lagrangian Mechanics            |                    |           |
| 10 | Mon, 9/12/2022 | Chap. 3 & 6 | Lagrangian Mechanics            |                    |           |



## Summary of equations from calculus of variation --

For the class of problems where we need to perform an extremization on an integral form:

$$I = \int_{x_i}^{x_f} f \left( \left\{ y(x), \frac{dy}{dx} \right\}, x \right) dx \quad \delta I = 0$$

A necessary condition is the Euler-Lagrange equations:

$$\left( \frac{\partial f}{\partial y} \right) - \frac{d}{dx} \left[ \left( \frac{\partial f}{\partial (dy/dx)} \right) \right] = 0$$

$$\frac{d}{dx} \left( f - \frac{\partial f}{\partial (dy/dx)} \frac{dy}{dx} \right) = \left( \frac{\partial f}{\partial x} \right)$$

## Application to particle dynamics

$x \rightarrow t$  (time)

$y \rightarrow q$  (generalized coordinate)

$f \rightarrow L$  (Lagrangian)

$I \rightarrow A$  or  $S$  (action)

Denote:  $\dot{q} \equiv \frac{dq}{dt}$

$$S = \int_{t_1}^{t_2} L(\{q, \dot{q}\}; t) dt$$



## Application to particle dynamics

Hamilton's principle states that the dynamical trajectory of a system is given by the path that extremizes the action integral

$$S = \int_{t_1}^{t_2} L(\{q, \dot{q}\}; t) dt \equiv \int_{t_1}^{t_2} L\left(\left\{y, \frac{dy}{dt}\right\}; t\right) dt$$

Simple example: vertical trajectory of particle of mass  $m$  subject to constant downward acceleration  $a=-g$ .

Newton's formulation:  $m \frac{d^2 y}{dt^2} = -mg$

Resultant trajectory:  $y(t) = y_i + v_i t - \frac{1}{2} g t^2$

Lagrangian for this case:

$$L = \frac{1}{2} m \left( \frac{dy}{dt} \right)^2 - mgy$$



Note that we have not yet justified this!

# Sir William Rowan Hamilton

Wednesday, September 11th, 2013



## Tribute to Sir William Hamilton (1805–1865)

Hello and welcome! This page is dedicated to the life and work of Sir William Rowan Hamilton.

William Rowan Hamilton was Ireland's greatest scientist. He was an mathematician, physicist, and astronomer and made important works in optics, dynamics, and algebra.

His contribution in dynamics plays a important role in the later developed quantum mechanics. His name was perpetuated in one of the fundamental concepts in quantum mechanics, called "Hamiltonian".


The Discovery of Quaternions is probably is his most familiar invention today.

2005 was the Hamilton Year, celebrating his 200th birthday. The year was dedicated to celebrate Irish Science. 2005 was called the Einstein year also, reminding of three great papers of the year 1905. So UNESCO designated 2005 to the World Year of Physics

Thanks for visiting this site! Please enjoy your stay while browsing through the pages.

### Sitemap

- Home
- Biography
- Mathematical studies
- Optics and Dynamics
- Quaternions
- Quotations
- Hamilton Key Dates
- Hamilton Links
- Graphics
- Math News

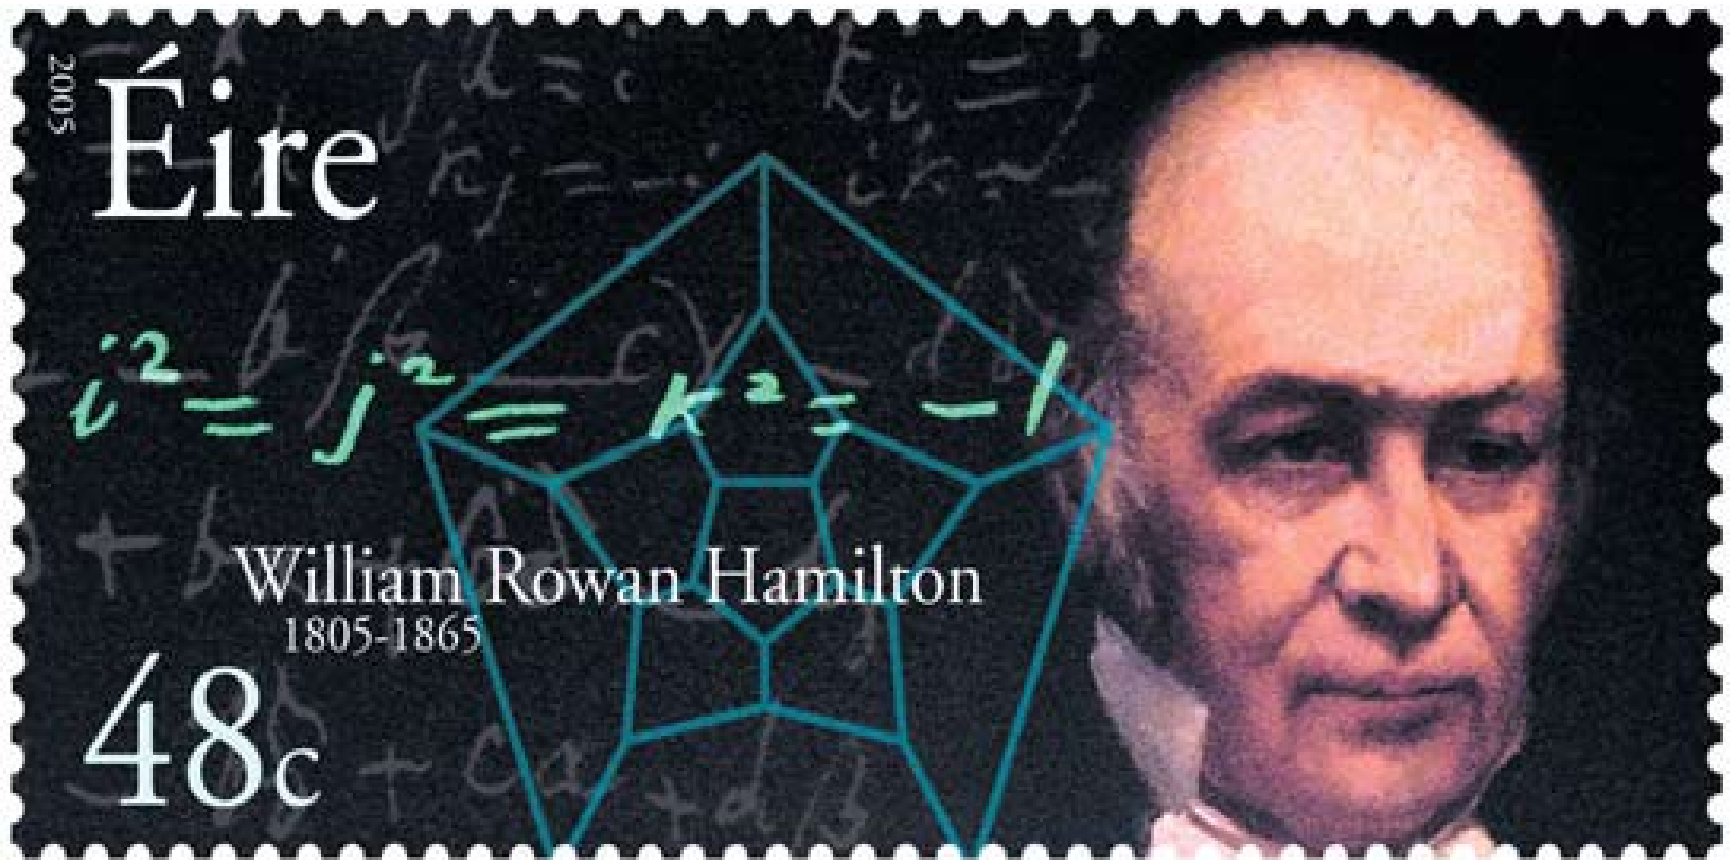

<https://irishpostalheritagegpo.wordpress.com/2017/06/08/william-rowan-hamilton-irish-mathematician-and-scientist/>

Now consider the Lagrangian defined to be :

$$L\left(\left\{y(t), \frac{dy}{dt}\right\}, t\right) \equiv T - U$$

Kinetic  
energy

Potential  
energy

In our example:

$$L\left(\left\{y(t), \frac{dy}{dt}\right\}, t\right) \equiv T - U = \frac{1}{2}m\left(\frac{dy}{dt}\right)^2 - mgy$$

Hamilton's principle states:

$$S \equiv \int_{t_i}^{t_f} L\left(\left\{y(t), \frac{dy}{dt}\right\}, t\right) dt \quad \text{is minimized for physical } y(t) :$$



Condition for minimizing the action in example:

$$S \equiv \int_{t_i}^{t_f} \left( \frac{1}{2} m \left( \frac{dy}{dt} \right)^2 - mgy \right) dt$$

Euler-Lagrange relations:

$$\frac{\partial L}{\partial y} - \frac{d}{dt} \frac{\partial L}{\partial \dot{y}} = 0$$

$$\Rightarrow -mg - \frac{d}{dt} m\dot{y} = 0$$

$$\Rightarrow \frac{d}{dt} \frac{dy}{dt} = -g \quad y(t) = y_i + v_i t - \frac{1}{2} g t^2$$

Perhaps looks familiar?

Check:

$$S \equiv \int_{t_i}^{t_f} \left( \frac{1}{2} m \left( \frac{dy}{dt} \right)^2 - mgy \right) dt$$

Assume  $t_i = 0$ ,  $y_i = h \equiv \frac{1}{2} gT^2$ ;  $t_f = T$ ,  $y_f = 0$

Trial trajectories:  $y_1(t) = \frac{1}{2} gT^2 (1 - t / T) = h - \frac{1}{2} gTt$

$$y_2(t) = \frac{1}{2} gT^2 (1 - t^2 / T^2) = h - \frac{1}{2} gt^2$$

$$y_3(t) = \frac{1}{2} gT^2 (1 - t^3 / T^3) = h - \frac{1}{2} gt^3 / T$$

Maple says:

$$S_1 = -0.125mg^2T^3$$

$$S_2 = -0.167mg^2T^3$$

$$S_3 = -0.150mg^2T^3$$

# Jean d'Alembert 1717-1783

French mathematician and philosopher



“Deriving” Lagrangian mechanics from Newton’s laws.

The Lagrangian function is:

$$L\left(\left\{\left\{q_i(t)\right\},\left\{\frac{dq_i}{dt}\right\}\right\},t\right)\equiv T-U \quad q_i(t) \text{ are generalized coordinates}$$


Hamilton's principle states:

$$S\equiv\int_{t_i}^{t_f}L\left(\left\{\left\{q_i(t)\right\},\left\{\frac{dq_i}{dt}\right\}\right\},t\right)dt \quad \text{is minimized for physical } q_i(t):$$

Digression -- notion of generalized coordinates

Referenced to cartesian coordinates:  $\mathbf{r}(t) = x(t)\hat{\mathbf{x}} + y(t)\hat{\mathbf{y}} + z(t)\hat{\mathbf{z}}$

Cylindrical coordinates

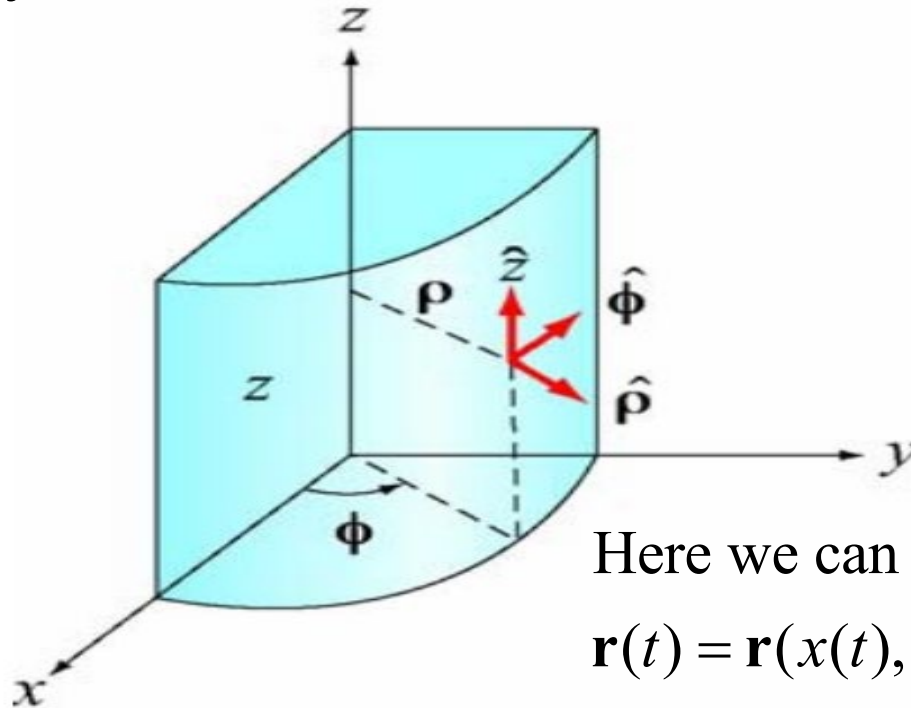

$$x = \rho \cos \phi \equiv x(\rho, \phi)$$

$$y = \rho \sin \phi \equiv y(\rho, \phi)$$

$$z = z$$

$$\rho = \sqrt{x^2 + y^2}$$

$$\phi = \arctan(y / x)$$

$$z = z$$


Here we can write

$$\mathbf{r}(t) = \mathbf{r}(x(t), y(t), z(t)) = \mathbf{r}(\rho(t), \phi(t), z(t))$$

**Figure B.2.4** Cylindrical coordinates

(Figure taken from 8.02 handout from MIT.)

## Spherical coordinates

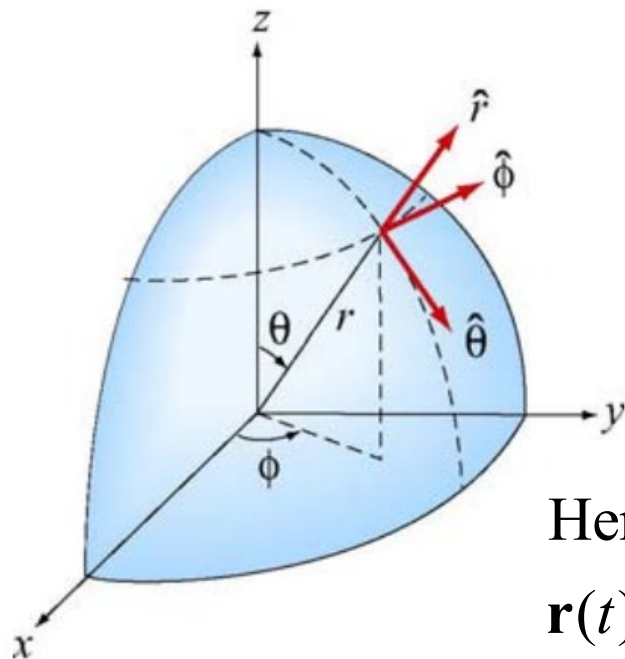

**Figure B.3.1** Spherical coordinates

$$x = r \sin \theta \cos \phi \equiv x(r, \theta, \phi)$$

$$y = r \sin \theta \sin \phi \equiv y(r, \theta, \phi)$$

$$z = r \cos \theta \equiv z(r, \theta, \phi)$$

$$r = \sqrt{x^2 + y^2 + z^2}$$

$$\theta = \arctan \left( \frac{\sqrt{x^2 + y^2}}{z} \right)$$


$$\phi = \arctan(y / x)$$

Here we can write

$$\mathbf{r}(t) = \mathbf{r}(x(t), y(t), z(t)) = \mathbf{r}(r(t), \theta(t), \phi(t))$$

(Figure taken from 8.02 handout from MIT.)

D'Alembert's principle:

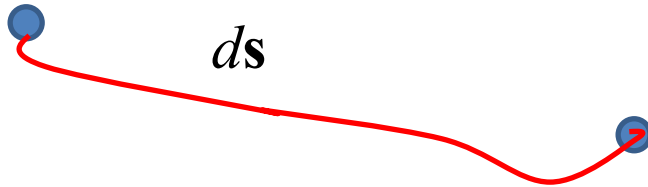

Note that:  $d\mathbf{s} = dx\hat{\mathbf{x}} + dy\hat{\mathbf{y}} + dz\hat{\mathbf{z}}$

Newton's laws:

$$\mathbf{F} - m\mathbf{a} = 0 \quad \Rightarrow \quad (\mathbf{F} - m\mathbf{a}) \cdot d\mathbf{s} = 0$$

$$\mathbf{F} \cdot d\mathbf{s} = \sum_{\sigma} \sum_i F_i \frac{\partial x_i}{\partial q_{\sigma}} \delta q_{\sigma}$$

For a conservative force:  $F_i = -\frac{\partial U}{\partial x_i}$

$$\mathbf{F} \cdot d\mathbf{s} = -\sum_{\sigma} \sum_i \frac{\partial U}{\partial x_i} \frac{\partial x_i}{\partial q_{\sigma}} \delta q_{\sigma} = -\sum_{\sigma} \frac{\partial U}{\partial q_{\sigma}} \delta q_{\sigma}$$

Generalized coordinates:

$$q_{\sigma}(\{x_i\}) \leftrightarrow x_i(\{q_{\sigma}\})$$

Note that

$q_{\sigma}(t)$  can be  $x(t), \theta(t), \dots$

$$dx \equiv dx_i = \sum_{\sigma} \frac{\partial x_i}{\partial q_{\sigma}} \delta q_{\sigma}$$

You might ask why we need “generalized” coordinates. In fact, Cartesian coordinates are often just fine, but using the more flexible possibilities reveals important aspects of the formalism. Cartesian coordinates are a special case of generalized coordinates.

Comment on notation --  $d\mathbf{s} = dx\hat{\mathbf{x}} + dy\hat{\mathbf{y}} + dz\hat{\mathbf{z}}$

For convenience let  $\hat{\mathbf{x}} = \hat{\mathbf{x}}_1$ ,  $\hat{\mathbf{y}} = \hat{\mathbf{x}}_2$ ,  $\hat{\mathbf{z}} = \hat{\mathbf{x}}_3$

Then  $\mathbf{F} \cdot d\mathbf{s} = \sum_{i=1}^3 F_i dx_i$

But now we want to change coordinates  $q_\sigma (\{x_i\}) \leftrightarrow x_i (\{q_\sigma\})$

$$dx_i = \sum_{\sigma} \frac{\partial x_i}{\partial q_{\sigma}} \delta q_{\sigma} \quad \mathbf{F} \cdot d\mathbf{s} = \sum_{i=1}^3 F_i dx_i = \sum_{\sigma} \sum_{i=1}^3 F_i \frac{\partial x_i}{\partial q_{\sigma}} \delta q_{\sigma}$$


Summary up to now --

$$\mathbf{F} \cdot d\mathbf{s} = \sum_{\sigma} \sum_i F_i \frac{\partial x_i}{\partial q_{\sigma}} \delta q_{\sigma}$$

For a conservative force:  $F_i = -\frac{\partial U}{\partial x_i}$

$$\mathbf{F} \cdot d\mathbf{s} = -\sum_{\sigma} \sum_i \frac{\partial U}{\partial x_i} \frac{\partial x_i}{\partial q_{\sigma}} \delta q_{\sigma} = -\sum_{\sigma} \frac{\partial U}{\partial q_{\sigma}} \delta q_{\sigma}$$



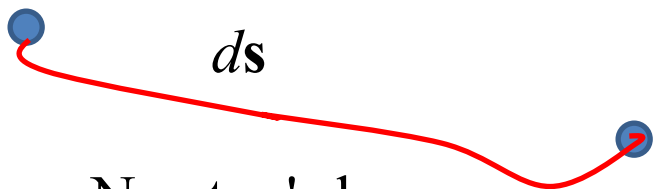

Generalized coordinates:

$q_\sigma (\{x_i\})$        $x \Leftrightarrow x_1$   
 $y \Leftrightarrow x_2$   
 $z \Leftrightarrow x_3$

Newton's laws:

$$\mathbf{F} - m\mathbf{a} = 0 \quad \Rightarrow \quad (\mathbf{F} - m\mathbf{a}) \cdot d\mathbf{s} = 0$$

$$\begin{aligned}
 m\mathbf{a} \cdot d\mathbf{s} &= \sum_\sigma \sum_i m\ddot{x}_i \frac{\partial x_i}{\partial q_\sigma} \delta q_\sigma \\
 &= \sum_\sigma \sum_i \left( \frac{d}{dt} \left( m\dot{x}_i \frac{\partial x_i}{\partial q_\sigma} \right) - m\dot{x}_i \frac{d}{dt} \frac{\partial x_i}{\partial q_\sigma} \right) \delta q_\sigma
 \end{aligned}$$

Claim:  $\frac{\partial x_i}{\partial q_\sigma} = \frac{\partial \dot{x}_i}{\partial \dot{q}_\sigma}$       and       $\frac{d}{dt} \frac{\partial x_i}{\partial q_\sigma} = \frac{\partial}{\partial q_\sigma} \frac{dx_i}{dt} \equiv \frac{\partial \dot{x}_i}{\partial q_\sigma}$

$$m\mathbf{a} \cdot d\mathbf{s} = \sum_\sigma \sum_i \left( \frac{d}{dt} \left( \frac{\partial \left( \frac{1}{2} m\dot{x}_i^2 \right)}{\partial \dot{q}_\sigma} \right) - \frac{\partial \left( \frac{1}{2} m\dot{x}_i^2 \right)}{\partial q_\sigma} \right) \delta q_\sigma$$


## Some details

$$\ddot{x}_i \frac{\partial x_i}{\partial q_\sigma} = \frac{d\dot{x}_i}{dt} \frac{\partial x_i}{\partial q_\sigma} = \frac{d}{dt} \left( \dot{x}_i \frac{\partial x_i}{\partial q_\sigma} \right) - \dot{x}_i \frac{d}{dt} \frac{\partial x_i}{\partial q_\sigma}$$

You may be still wondering why we need to introduce “generalized” coordinates when cartesian coordinates are an example. What the generalized coordinates allow us to show is that

$$m\mathbf{a} \cdot d\mathbf{s} = \sum_{\sigma} \left( \frac{d}{dt} \frac{\partial T}{\partial \dot{q}_{\sigma}} - \frac{\partial T}{\partial q_{\sigma}} \right) \delta q_{\sigma}$$

where  $T \equiv \sum_i \frac{1}{2} m \dot{x}_i^2$  (kinetic energy)

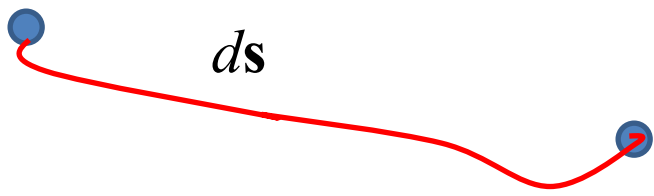

$$x_i = x_i(\{q_\sigma(t)\}, t)$$


Claim:  $\frac{\partial x_i}{\partial q_\sigma} = \frac{\partial \dot{x}_i}{\partial \dot{q}_\sigma}$

Details:  $\dot{x}_i = \sum_\sigma \frac{\partial x_i}{\partial q_\sigma} \dot{q}_\sigma + \frac{\partial x_i}{\partial t}$       Therefore:  $\frac{\partial \dot{x}_i}{\partial \dot{q}_\sigma} = \frac{\partial x_i}{\partial q_\sigma}$

Claim:  $\frac{d}{dt} \frac{\partial x_i}{\partial q_\sigma} = \frac{\partial}{\partial q_\sigma} \frac{dx_i}{dt} \equiv \frac{\partial \dot{x}_i}{\partial q_\sigma}$

$\sum_{\sigma'} \frac{\partial^2 x_i}{\partial q_\sigma \partial q_{\sigma'}} \dot{q}_{\sigma'} + \frac{\partial^2 x_i}{\partial t \partial q_\sigma}$ 

 $\sum_{\sigma'} \frac{\partial^2 x_i}{\partial q_\sigma \partial q_{\sigma'}} \dot{q}_{\sigma'} + \frac{\partial^2 x_i}{\partial q_\sigma \partial t}$

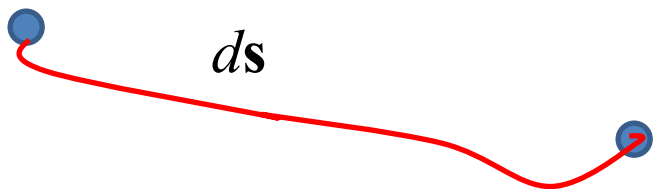

Generalized coordinates:

$$q_\sigma (\{x_i\})$$

$$m\mathbf{a} \cdot d\mathbf{s} = \sum_\sigma \sum_i \left( \frac{d}{dt} \left( \frac{\partial \left( \frac{1}{2} m \dot{x}_i^2 \right)}{\partial \dot{q}_\sigma} \right) - \frac{\partial \left( \frac{1}{2} m \dot{x}_i^2 \right)}{\partial q_\sigma} \right) \delta q_\sigma$$


Define -- kinetic energy:  $T \equiv \sum_i \frac{1}{2} m \dot{x}_i^2$

$$m\mathbf{a} \cdot d\mathbf{s} = \sum_\sigma \left( \frac{d}{dt} \frac{\partial T}{\partial \dot{q}_\sigma} - \frac{\partial T}{\partial q_\sigma} \right) \delta q_\sigma$$

Recall:

$$\mathbf{F} \cdot d\mathbf{s} = - \sum_\sigma \sum_i \frac{\partial U}{\partial x_i} \frac{\partial x_i}{\partial q_\sigma} \delta q_\sigma = - \sum_\sigma \frac{\partial U}{\partial q_\sigma} \delta q_\sigma$$

$$(\mathbf{F} - m\mathbf{a}) \cdot d\mathbf{s} = - \sum_\sigma \frac{\partial U}{\partial q_\sigma} \delta q_\sigma - \sum_\sigma \left( \frac{d}{dt} \frac{\partial T}{\partial \dot{q}_\sigma} - \frac{\partial T}{\partial q_\sigma} \right) \delta q_\sigma = 0$$

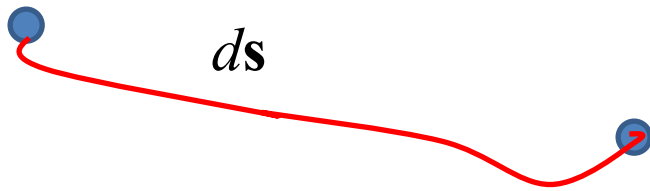


Generalized coordinates :  
 $q_\sigma(\{x_i\})$

$$\begin{aligned}
 (\mathbf{F} - m\mathbf{a}) \cdot d\mathbf{s} &= -\sum_\sigma \frac{\partial U}{\partial q_\sigma} \delta q_\sigma - \sum_\sigma \left( \frac{d}{dt} \frac{\partial T}{\partial \dot{q}_\sigma} - \frac{\partial T}{\partial q_\sigma} \right) \delta q_\sigma = 0 \\
 &= -\sum_\sigma \left( \frac{d}{dt} \frac{\partial (T - U)}{\partial \dot{q}_\sigma} - \frac{\partial (T - U)}{\partial q_\sigma} \right) \delta q_\sigma = 0 \\
 &= -\sum_\sigma \left( \frac{d}{dt} \frac{\partial L}{\partial \dot{q}_\sigma} - \frac{\partial L}{\partial q_\sigma} \right) \delta q_\sigma = 0
 \end{aligned}$$

$$L(q_\sigma, \dot{q}_\sigma; t) = T - U$$

Note: This is only true if

$$\frac{\partial U}{\partial \dot{q}_\sigma} = 0$$

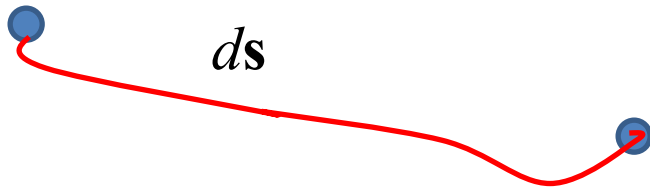

Generalized coordinates :  
 $q_\sigma(\{x_i\})$

Define -- Lagrangian:  $L \equiv T - U$

$$L = L(\{q_\sigma\}, \{\dot{q}_\sigma\}, t)$$

$$(\mathbf{F} - m\mathbf{a}) \cdot d\mathbf{s} = - \sum_\sigma \left( \frac{d}{dt} \frac{\partial L}{\partial \dot{q}_\sigma} - \frac{\partial L}{\partial q_\sigma} \right) \delta q_\sigma = 0$$

$$\Rightarrow \text{Minimization integral: } S = \int_{t_i}^{t_f} L(\{q_\sigma\}, \{\dot{q}_\sigma\}, t) dt$$

→ Hamilton's principle from the "backwards" application of the Euler-Lagrange equations --

Define -- Lagrangian:  $L \equiv T - U$


$$L = L(\{q_\sigma\}, \{\dot{q}_\sigma\}, t)$$



Euler – Lagrange equations :  $L = L(\{q_\sigma\}, \{\dot{q}_\sigma\}, t) = T - U$

$$\frac{d}{dt} \frac{\partial L}{\partial \dot{q}_\sigma} - \frac{\partial L}{\partial q_\sigma} = 0$$

Example:

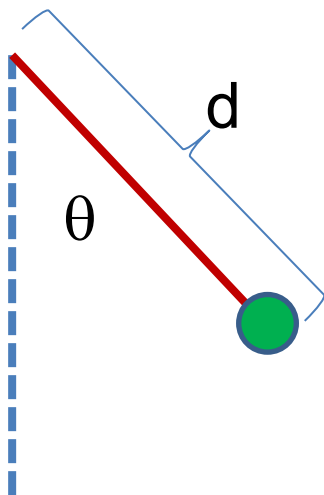

$$L = L(\theta, \dot{\theta}) = \frac{1}{2} m d^2 \dot{\theta}^2 - m g (d - d \cos \theta)$$

$$\frac{d}{dt} \frac{\partial L}{\partial \dot{q}_\sigma} - \frac{\partial L}{\partial q_\sigma} = 0 \quad \Rightarrow \quad \frac{d}{dt} m d^2 \dot{\theta} + m g d \sin \theta = 0$$

$$\frac{d^2 \theta}{dt^2} = -\frac{g}{d} \sin \theta$$



Another example:  $L = L(\{q_\sigma\}, \{\dot{q}_\sigma\}, t) = T - U$

$$\frac{d}{dt} \frac{\partial L}{\partial \dot{q}_\sigma} - \frac{\partial L}{\partial q_\sigma} = 0$$

$$L = L(\alpha, \beta, \gamma, \dot{\alpha}, \dot{\beta}, \dot{\gamma}) = \frac{1}{2} I_1 (\dot{\alpha}^2 \sin^2 \beta + \dot{\beta}^2) + \frac{1}{2} I_3 (\dot{\alpha} \cos \beta + \dot{\gamma})^2 - Mgd \cos \beta$$

$$\frac{d}{dt} \frac{\partial L}{\partial \dot{\alpha}} = \frac{d}{dt} (I_1 \dot{\alpha} \sin^2 \beta + I_3 (\dot{\alpha} \cos \beta + \dot{\gamma}) \cos \beta) = 0$$

$$\frac{d}{dt} \frac{\partial L}{\partial \dot{\beta}} = \frac{d}{dt} (I_1 \dot{\beta}) = \frac{\partial L}{\partial \beta}$$

$$\frac{d}{dt} \frac{\partial L}{\partial \dot{\gamma}} = \frac{d}{dt} (I_3 (\dot{\alpha} \cos \beta + \dot{\gamma})) = 0$$





# Example – simple harmonic oscillator

$$T = \frac{1}{2} m \dot{x}^2$$


$$U = \frac{1}{2} m \omega^2 x^2$$

Assume  $x(0) = 0$  and  $x(\frac{\pi}{\omega}) = 0$       $S = \frac{1}{2} m \int_0^{\pi/\omega} (\dot{x}^2 - \omega^2 x^2) dt$

Trial functions      $x_1(t) = A \sin(\omega t)$       $S_1 = 0$

$x_2(t) = A \omega t \cdot (\pi - \omega t)$       $S_2 = 0.067 A^2 m \omega^2$

$x_3(t) = A e^{-\omega t} \sin(\omega t)$       $S_3 = 0.062 A^2 m \omega^2$

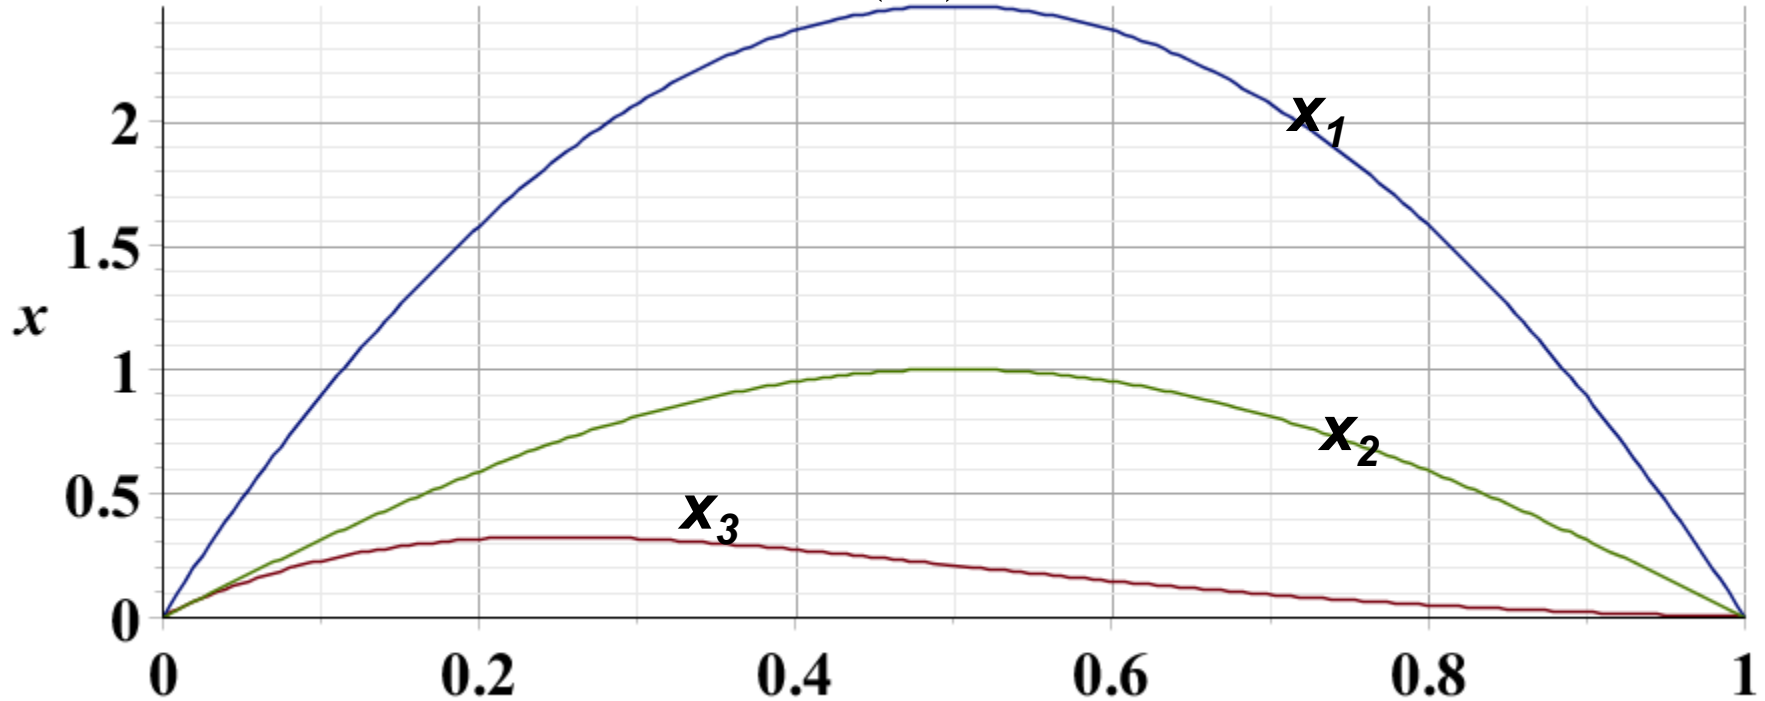



## Summary –

Hamilton's principle:

Given the Lagrangian function:  $L = L(\{q_\sigma\}, \{\dot{q}_\sigma\}, t) \equiv T - U,$

The physical trajectories of the generalized coordinates  $\{q_\sigma(t)\}$  are those which minimize the action:  $S = \int L(\{q_\sigma\}, \{\dot{q}_\sigma\}, t) dt$

Euler-Lagrange equations:

$$\sum_{\sigma} \left( \frac{d}{dt} \frac{\partial L}{\partial \dot{q}_{\sigma}} - \frac{\partial L}{\partial q_{\sigma}} \right) \delta q_{\sigma} = 0 \quad \Rightarrow \text{for each } \sigma : \quad \left( \frac{d}{dt} \frac{\partial L}{\partial \dot{q}_{\sigma}} - \frac{\partial L}{\partial q_{\sigma}} \right) = 0$$

Note: in “proof” of Hamilton’s principle:

$$\left( \frac{d}{dt} \frac{\partial L}{\partial \dot{q}_\sigma} - \frac{\partial L}{\partial q_\sigma} \right) = 0 \quad \text{for} \quad L = L(\{q_\sigma\}, \{\dot{q}_\sigma\}, t) \equiv T - U$$

It was necessary to assume that :

$\frac{d}{dt} \frac{\partial U}{\partial \dot{q}_\sigma}$  does not contribute to the result.

⇒ How can we represent velocity-dependent forces?

Why do we need velocity dependent forces?

- a. Friction is sometimes represented as a velocity dependent force. (difficult to treat with Lagrangian mechanics.)
- b. Lorentz force on a moving charged particle in the presence of a magnetic field.

## Lorentz forces:

For particle of charge  $q$  in an electric field  $\mathbf{E}(\mathbf{r}, t)$  and magnetic field  $\mathbf{B}(\mathbf{r}, t)$ :

$$\text{Lorentz force: } \mathbf{F} = q\left(\mathbf{E} + \frac{1}{c} \mathbf{v} \times \mathbf{B}\right)$$

$$x\text{-component: } F_x = q\left(E_x + \frac{1}{c} (\mathbf{v} \times \mathbf{B})_x\right)$$

In this case, it is convenient to use cartesian coordinates

$$L = L(x, y, z, \dot{x}, \dot{y}, \dot{z}, t) \equiv T - U$$

$$T = \frac{1}{2} m (\dot{x}^2 + \dot{y}^2 + \dot{z}^2)$$

$$x\text{-component: } \left( \frac{d}{dt} \frac{\partial L}{\partial \dot{x}} - \frac{\partial L}{\partial x} \right) = 0$$

$$\text{Apparently: } F_x = -\frac{\partial U}{\partial x} + \frac{d}{dt} \frac{\partial U}{\partial \dot{x}}$$

$$\text{Answer: } U = q\Phi(\mathbf{r}, t) - \frac{q}{c} \dot{\mathbf{r}} \cdot \mathbf{A}(\mathbf{r}, t)$$

$$\text{where } \mathbf{E}(\mathbf{r}, t) = -\nabla\Phi(\mathbf{r}, t) - \frac{1}{c} \frac{\partial \mathbf{A}(\mathbf{r}, t)}{\partial t} \quad \mathbf{B}(\mathbf{r}, t) = \nabla \times \mathbf{A}(\mathbf{r}, t)$$

Note: Here we are using cartesian coordinates for convenience.