

PHY 114 A General Physics II
11 AM-12:15 PM TR Olin 101

Plan for Lecture 6:

- 1. Electrostatic capacitance (Chapter 26)**
- 2. Voltage and capacitance in circuits**
- 3. Energy storage in capacitors**

2/9/2012 PHY 114 A Spring 2012 -- Lecture 6 1

i-clicker exercise
 Exam feedback
 A. Exam was too easy
 B. Exam was too hard
 C. Exam was about right

i-clicker exercise
 Would you like to schedule a session to go over the exam?
 A. Yes
 B. No

i-clicker exercise
 On the possibility of an optional 4th exam
 A. Would like to take a 4th exam
 B. Would not like to take a 4th exam

2/9/2012 PHY 114 A Spring 2012 -- Lecture 6 2

No.	Lecture Date	Topic	Text Sections	Problem Assignments	Assignment Due Date
1	01/19/2012	Coulomb's law	23.1-23.4	23.6, 23.8a, 23.13	01/24/2012
2	01/24/2012	Electric field	23.4-23.7	23.22, 23.20, 23.61a	01/26/2012
3	01/26/2012	Gauss's Law	24.1-24.3	24.22a, 24.23, 24.40	01/31/2012
4	01/31/2012	Electric potential	25.1-25.4	25.12, 25.23, 25.34, 25.01	02/02/2012
5	02/02/2012	Electric potential	25.5-25.8	(Review for exam)	
	02/07/2012	Exam			
6	02/09/2012	Capacitance and dielectrics	26.1-26.7	26.4, 26.13, 26.30	02/14/2012
7	02/14/2012	Current and resistance	27.1-27.6	27.3, 27.12, 27.29	02/16/2012
8	02/16/2012	Direct current circuits	28.1-28.2	28.3, 28.7, 28.19	02/21/2012
9	02/21/2012	Direct current circuits	28.3-28.5	28.23, 28.25, 28.34	02/23/2012
10	02/23/2012	Review	26.1-28.5	(Review for exam)	
	02/28/2012	Exam			
11	03/01/2012	Magnetic fields	29.1-30.6		
12	03/06/2012	Faraday's law	31.1-31.5		

Remember to send in your chapter reading questions...

2/9/2012 PHY 114 A Spring 2012 -- Lecture 6 3

First – a word from our sponsors:

<http://www.wfu.edu/physics>

The Physics Department will host a reception for all prospective Physics majors on Monday, February 13 from 3-4:30 p.m. in the Olin foyer.

Wake Forest Research Fellowship Program <http://college.wfu.edu/research-fellowship/>

Purpose

The Wake Forest Research Fellowship Program is designed to encourage individual Wake Forest undergraduates to join their professors as junior partners on scholarly research and creative projects. These mentored projects provide invaluable opportunities for students to experience the excitement of performing innovative scholarly work.

About the Award

These projects are performed during the 10 weeks of the Wake Forest University summer school sessions. The award provides a \$4,000.00 stipend. If on-campus housing is desired, the award will also provide for one-half the cost of a double room for both summer sessions. So that students can devote their entire energies toward their projects, Wake Forest Research Fellowship recipients may not enroll in summer school courses. It is hoped that many projects begun in the Fellowship program might continue in the form of independent study or directed research courses in subsequent years.

If required for the work, the student and mentor may request up to \$500 support for supplies.

Qualifications and Requirements

Student applicants must have a cumulative 3.0 grade point average at the time of application. Sophomore standing (25 or more hours passed) is required by the time the research project begins.

Proposals are due by February 22, 2012.




2/9/2012

PHY 114 A Spring 2012 – Lecture 6

4

Electric potential for constant electric field:



$$V = - \int_{x_{ref}}^x \mathbf{E} \cdot d\mathbf{s}$$

$$= - \int_0^x \frac{\sigma}{\epsilon_0} dx'$$

$$= - \frac{\sigma}{\epsilon_0} x \quad \text{for } 0 \leq x \leq d$$

$$\Delta V = V(d) - V(0) = - \frac{\sigma}{\epsilon_0} d$$


$$\sigma = \frac{Q}{A} \Rightarrow \Delta V = -Q \frac{d}{A\epsilon_0}$$

2/9/2012

PHY 114 A Spring 2012 – Lecture 4

5

Electric potential between parallel plates with charge Q



$$V = - \int_{x_{ref}}^x \mathbf{E} \cdot d\mathbf{s}$$

$$\Delta V = V(d) - V(0) = - \frac{\sigma}{\epsilon_0} d$$

$$\sigma = \frac{Q}{A} \Rightarrow \Delta V = -Q \frac{d}{A\epsilon_0}$$

$$\Delta V = - \frac{Q}{A\epsilon_0 / d} \equiv - \frac{Q}{C}$$

$$\Rightarrow C = A\epsilon_0 / d$$

2/9/2012

PHY 114 A Spring 2012 – Lecture 4

6

General formulation of capacitance

Ignoring sign: $Q = C \Delta V$

Charge on + and - terminals of capacitor \rightarrow Q

Voltage drop across capacitor terminals \leftarrow ΔV

Depends on geometry and material composition of capacitor

Units: $C = \frac{\text{Coulombs}}{\text{Volt}} \equiv \text{Farad}$


For parallel plate capacitors in vacuum (or air):
 $C = A\epsilon_0 / d$

For parallel plate capacitors in dielectric medium:
 $C = A\kappa\epsilon_0 / d$

$\kappa \equiv$ dielectric constant (typically $\kappa > 1$)

2/9/2012 PHY 114 A Spring 2012 -- Lecture 6 7

Cylindrical geometry capacitor:



$$\mathbf{E} = \frac{Q}{2\pi\epsilon_0 L r} \hat{\mathbf{r}} \quad \text{for } a \leq r \leq b$$

$$V_b - V_a = -\int_a^b \mathbf{E} \cdot d\mathbf{r}$$

$$= -\frac{Q}{2\pi\epsilon_0 L} \int_a^b \frac{dr}{r}$$

$$= -\frac{Q}{2\pi\epsilon_0 L} \ln \frac{b}{a} \quad Q = C \Delta V$$


$$\Rightarrow C = \frac{2\pi\epsilon_0 L}{\ln(b/a)} \quad (\text{in vacuum or air})$$

$$\Rightarrow C = \frac{2\pi\kappa\epsilon_0 L}{\ln(b/a)} \quad (\text{dielectric medium})$$

2/9/2012 PHY 114 A Spring 2012 -- Lecture 6 8

Capacitor usage in energy storage:

<http://www.mpoweruk.com/alternatives.htm>

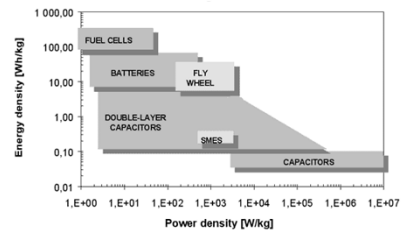

2/9/2012 PHY 114 A Spring 2012 -- Lecture 6 9

Questions about usefulness of electric fields outside of physics class.

Example: iPad touch screen (from HowThingsWork web page)

- Self capacitance: Circuitry monitors changes in an array of electrodes.
- Mutual capacitance: A layer of driving lines carries current. A separate layer of sensing lines detects changes in the electrical charge when you place your finger on the screen.

Regardless of which method the screen uses, you change the electrical properties of the screen every time you touch it. The iPad records this change as data, and it uses mathematical algorithms to translate the data into an understanding of where your fingers are. In the next section, we'll explore what the iPad touch does with this data and how to navigate through its features.

©2007 HowThingsWork.com *Not to scale

PHY 114 A Spring 2012 -- Lecture 2

Electrical circuits using capacitors and voltage source

Capacitor symbol

Battery symbol

Switch symbol
 Open
 Closed

Wire connection

$$\Delta V = \frac{Q}{C}$$

PHY 114 A Spring 2012 -- Lecture 6

More complicated circuits –
Capacitors connected in parallel

$$\Delta V = \frac{Q_1}{C_1} = \frac{Q_2}{C_2} \equiv \frac{Q_{tot}}{C_{eq}}$$

$$Q_{tot} = Q_1 + Q_2 = C_1\Delta V + C_2\Delta V$$

$$= (C_1 + C_2)\Delta V$$

$$\Rightarrow C_{eq} = C_1 + C_2$$

PHY 114 A Spring 2012 -- Lecture 6

More complicated circuits –
Capacitors connected in series

$$\Delta V = \frac{Q_1}{C_1} + \frac{Q_2}{C_2} \equiv \frac{Q_{tot}}{C_{eq}}$$

$$Q_{tot} = Q_1 = Q_2 = C_{eq} \Delta V$$

$$\Rightarrow C_{eq} = \frac{1}{\frac{1}{C_1} + \frac{1}{C_2}}$$

2/9/2012 PHY 114 A Spring 2012 – Lecture 6 13

Equivalent capacitance circuits

Parallel connections: $C_{eq} = C_1 + C_2 + C_3 + \dots$

Series connections: $C_{eq} = \frac{1}{\frac{1}{C_1} + \frac{1}{C_2} + \frac{1}{C_3} + \dots}$

2/9/2012 PHY 114 A Spring 2012 – Lecture 6 14

i-clicker question

Consider the circuit diagrams shown below. In each the voltage is $\Delta V = 100V$ and $C_1 = C_2 = 1\mu F$. Which circuit can store the most total charge?

A.

B.

2/9/2012 PHY 114 A Spring 2012 – Lecture 6 15

Energy storage within a capacitor

Electrons move from the plate to the wire, leaving the plate positively charged.

Separation of charges represents potential energy.

Electrons move from the wire to the plate.

Electric field in wire

Electric field between plates

Electric field in wire

Chemical potential energy in the battery is reduced.

$$dU = \frac{q}{C} dq$$

$$U = \int_0^Q \frac{q}{C} dq = \frac{1}{2} \frac{Q^2}{C}$$

$$U = \frac{1}{2} C (\Delta V)^2$$

2/9/2012 PHY 114 A Spring 2012 – Lecture 6 16

Effects of dielectric materials in capacitors

The charged edges of the dielectric can be modeled as an additional pair of parallel plates establishing an electric field \vec{E}_{ind} in the direction opposite that of \vec{E}_0 .

$$\vec{E}_{total} = \vec{E}_0 - \vec{E}_{ind}$$

$$\vec{E}_{ind} = \chi \vec{E}_{total}$$

$$\vec{E}_{total} = \frac{1}{1 + \chi} \vec{E}_0 \equiv \frac{1}{\kappa} \vec{E}_0$$

$$\Delta V_{total} = \frac{1}{\kappa} \Delta V_0 = \frac{Q}{\kappa C_0}$$

$$\Rightarrow C = \kappa C_0$$

2/9/2012 PHY 114 A Spring 2012 – Lecture 6 17

A tubular capacitor whose plates are separated by paper and then rolled into a cylinder

A high-voltage capacitor consisting of many parallel plates separated by insulating oil

An electrolytic capacitor

Paper

Metal foil

Plates

Oil

Case


Electrolyte

Contacts

Metallic foil + oxide layer

2/9/2012 PHY 114 A Spring 2012 – Lecture 6 18

Example:



Find equivalent capacitance:

$$C_{eq} = \frac{1}{\frac{1}{8} + \frac{1}{6+2} + \frac{1}{8}} \mu F = \frac{8}{3} \mu F$$

Find total charge:

$$Q = C_{eq} \Delta V = \frac{8}{3} \times 10^{-6} \cdot 9 \text{ Coul} = 2.4 \times 10^{-5} \text{ Coul}$$

2/9/2012

PHY 114 A Spring 2012 -- Lecture 6

19

TABLE 26.1 Approximate Dielectric Constants and Dielectric Strengths of Various Materials at Room Temperature

Material	Dielectric Constant κ	Dielectric Strength* (10^6 V/m)
Air (dry)	1.000 59	3
Bakelite	4.9	24
Fused quartz	3.78	8
Mylar	3.2	7
Neoprene rubber	6.7	12
Nylon	3.4	14
Paper	3.7	16
Paraffin-impregnated paper	3.5	11
Polystyrene	2.56	24
Polyvinyl chloride	3.4	40
Porcelain	6	12
Pyrex glass	5.6	14
Silicone oil	2.5	15
Strontium titanate	233	8
Teflon	2.1	60
Vacuum	1.000 00	—
Water	80	—

*The dielectric strength equals the maximum electric field that can exist in a dielectric without electrical breakdown. These values depend strongly on the presence of impurities and flaws in the materials.

2/9/2012

PHY 114 A Spring 2012 -- Lecture 6

20
