

**PHY 712 Electrodynamics**  
**10-10:50 AM MWF Olin 103**

**Notes for Lecture 12:**

**Start reading Chapter 5**

**A. Magnetostatics**

**B. Vector potential**

**C. Example: current loop**

# Course schedule for Spring 2023

(Preliminary schedule -- subject to frequent adjustment.)

	Lecture date	JDJ Reading	Topic	HW	Due date
1	Mon: 01/9/2023	Chap. 1 & Appen.	Introduction, units and Poisson equation	<a href="#">#1</a>	01/13/2023
2	Wed: 01/11/2023	Chap. 1	Electrostatic energy calculations	<a href="#">#2</a>	01/18/2023
3	Fri: 01/13/2023	Chap. 1	Electrostatic energy calculations thanks to Ewald	<a href="#">#3</a>	01/18/2023
	Mon: 01/16/2023		MLK Holiday -- no class		
4	Wed: 01/18/2023	Chap. 1 & 2	Electrostatic potentials and fields	<a href="#">#4</a>	01/20/2023
5	Fri: 01/20/2023	Chap. 1 - 3	Poisson's equation in 2 and 3 dimensions	<a href="#">#5</a>	01/23/2023
6	Mon: 01/23/2023	Chap. 1 - 3	Brief introduction to numerical methods	<a href="#">#6</a>	01/25/2023
7	Wed: 01/25/2023	Chap. 2 & 3	Image charge constructions	<a href="#">#7</a>	01/30/2023
8	Fri: 01/27/2023	Chap. 2 & 3	Cylindrical and spherical geometries		
9	Mon: 01/30/2023	Chap. 3 & 4	Spherical geometry and multipole moments	<a href="#">#8</a>	02/01/2023
10	Wed: 02/01/2023	Chap. 4	Dipoles and Dielectrics	<a href="#">#9</a>	02/03/2023
11	Fri: 02/03/2023	Chap. 4	Dipoles and Dielectrics	<a href="#">#10</a>	02/06/2023
12	Mon: 02/06/2023	Chap. 5	Magnetostatics	<a href="#">#11</a>	02/08/2023
13	Wed: 02/08/2023	Chap. 5	Magnetic dipoles and hyperfine interaction		
14	Fri: 02/10/2023	Chap. 5	Magnetic dipoles and dipolar fields		

# PHY 712 -- Assignment #11

February 06, 2023


Start reading Chapter 5 in **Jackson** .

1. Consider an infinitely long cylindrical wire with radius  $a$ , oriented along the  $\mathbf{z}$  axis. There is a steady uniform current inside the wire. Specifically, in terms of  $r$  the radial parameter of the cylindrical coordinates of the system the current density is  $\mathbf{J}(r)=\mathbf{J}_0$  , where  $\mathbf{J}_0$  is a constant vector pointing along the  $z$ -axis, for  $r \leq a$  and zero otherwise.
  - a. Find the vector potential ( $\mathbf{A}$ ) for all  $r$ .
  - b. Find the magnetic flux field ( $\mathbf{B}$ ) for all  $r$ .

Note that it is possible to solve this problem using ideas learned in beginning physics (such PHY 114).

# Magnetostatics

Magnetic flux density or magnetic induction field  $\mathbf{B}$   
Steady state (constant in time) current density  $\mathbf{J}$

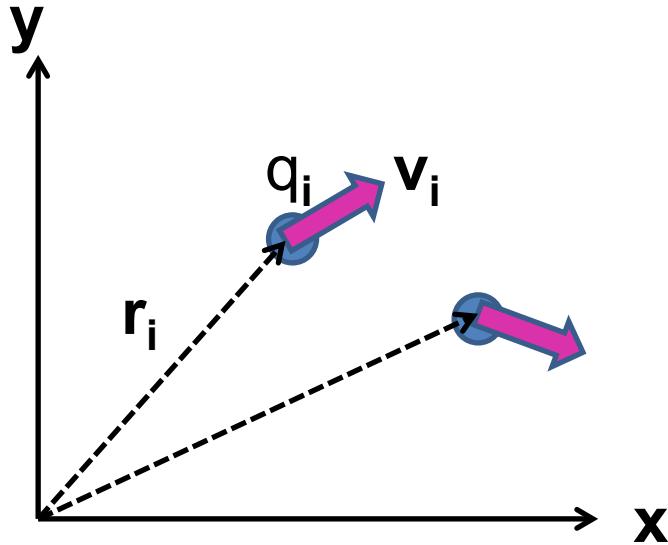

$$\mathbf{J}(\mathbf{r}) = \sum_i q_i \mathbf{v}_i \delta^3(\mathbf{r} - \mathbf{r}_i)$$

Note that "statics" implies that  $\nabla \cdot \mathbf{J} = 0$ .

This follows from the continuity equation :

$$\frac{\partial \rho}{\partial t} + \nabla \cdot \mathbf{J} = 0$$

## Comparison of electrostatics and magnetostatics

Electrostatic field due to charge density  $\rho(\mathbf{r})$ :

$$\mathbf{E}(\mathbf{r}) = \frac{1}{4\pi\epsilon_0} \int d^3r' \rho(\mathbf{r}') \frac{\mathbf{r} - \mathbf{r}'}{|\mathbf{r} - \mathbf{r}'|^3}$$

Magnetostatic field due to current density  $\mathbf{J}(\mathbf{r})$ :

$$\mathbf{B}(\mathbf{r}) = \frac{\mu_0}{4\pi} \int d^3r' \mathbf{J}(\mathbf{r}') \times \frac{\mathbf{r} - \mathbf{r}'}{|\mathbf{r} - \mathbf{r}'|^3}$$

# Alternative forms magnetostatic equations

Magnetostatic field due to current density  $\mathbf{J}(\mathbf{r})$ :

$$\mathbf{B}(\mathbf{r}) = \frac{\mu_0}{4\pi} \int d^3r' \mathbf{J}(\mathbf{r}') \times \frac{\mathbf{r} - \mathbf{r}'}{|\mathbf{r} - \mathbf{r}'|^3} = \frac{\mu_0}{4\pi} \int d^3r' \left( \nabla \frac{1}{|\mathbf{r} - \mathbf{r}'|} \right) \times \mathbf{J}(\mathbf{r}')$$

Note that: 
$$\nabla \frac{1}{|\mathbf{r} - \mathbf{r}'|} = -\frac{\mathbf{r} - \mathbf{r}'}{|\mathbf{r} - \mathbf{r}'|^3}$$

Also note that: 
$$\nabla \times (s(\mathbf{r}) \mathbf{V}(\mathbf{r})) = \nabla s(\mathbf{r}) \times \mathbf{V}(\mathbf{r}) + s(\mathbf{r}) \nabla \times \mathbf{V}(\mathbf{r})$$

let  $s(\mathbf{r}) = \frac{1}{|\mathbf{r} - \mathbf{r}'|}$  and  $\mathbf{V}(\mathbf{r}) = \mathbf{J}(\mathbf{r}')$ , where  $\mathbf{r}'$  is fixed

$$\left( \nabla \frac{1}{|\mathbf{r} - \mathbf{r}'|} \right) \times \mathbf{J}(\mathbf{r}') = \nabla s(\mathbf{r}) \times \mathbf{V}(\mathbf{r}) = \nabla \times (s(\mathbf{r}) \mathbf{V}(\mathbf{r})) - s(\mathbf{r}) \nabla \times \mathbf{V}(\mathbf{r})$$

Magnetostatic field due to current density  $\mathbf{J}(\mathbf{r})$ :

$$\begin{aligned}\mathbf{B}(\mathbf{r}) &= \frac{\mu_0}{4\pi} \int d^3r' \left( \nabla \frac{1}{|\mathbf{r} - \mathbf{r}'|} \right) \times \mathbf{J}(\mathbf{r}') \\ &= \frac{\mu_0}{4\pi} \int d^3r' \left( \nabla \times \left( \frac{\mathbf{J}(\mathbf{r}')}{|\mathbf{r} - \mathbf{r}'|} \right) - \frac{1}{|\mathbf{r} - \mathbf{r}'|} \nabla \times \mathbf{J}(\mathbf{r}') \right) \\ \Rightarrow \mathbf{B}(\mathbf{r}) &= \frac{\mu_0}{4\pi} \nabla \times \int d^3r' \frac{\mathbf{J}(\mathbf{r}')}{|\mathbf{r} - \mathbf{r}'|}\end{aligned}$$

Alternative forms magnetostatic equations -- continued

$$\mathbf{B}(\mathbf{r}) = \frac{\mu_0}{4\pi} \nabla \times \int d^3 r' \frac{\mathbf{J}(\mathbf{r}')}{|\mathbf{r} - \mathbf{r}'|}$$

$$\Rightarrow \nabla \cdot \mathbf{B}(\mathbf{r}) = 0 \quad \text{No magnetic monopoles}$$

$$\Rightarrow \nabla \times \mathbf{B}(\mathbf{r}) = \mu_0 \mathbf{J}(\mathbf{r}) \quad \text{Ampere's law}$$

"Proof" of Ampere's law for magnetostatic system :

$$\nabla \times \mathbf{B}(\mathbf{r}) = \frac{\mu_0}{4\pi} \nabla \times \nabla \times \int d^3 r' \frac{\mathbf{J}(\mathbf{r}')}{|\mathbf{r} - \mathbf{r}'|}$$

$$\text{Note that : } \nabla \times \nabla \times \mathbf{V} = \nabla(\nabla \cdot \mathbf{V}) - \nabla^2 \mathbf{V}$$

$$\text{Recall that : } \nabla^2 \frac{1}{|\mathbf{r} - \mathbf{r}'|} = -4\pi\delta^3(\mathbf{r} - \mathbf{r}') \quad \text{and} \quad \nabla \cdot \mathbf{J}(\mathbf{r}) = 0$$



Differential forms of magnetostatic equations:

$$\Rightarrow \nabla \cdot \mathbf{B}(\mathbf{r}) = 0 \quad \text{No magnetic monopoles}$$

$$\Rightarrow \nabla \times \mathbf{B}(\mathbf{r}) = \mu_0 \mathbf{J}(\mathbf{r}) \quad \text{Ampere's law}$$

Magnetostatic vector potential

$$\mathbf{B}(\mathbf{r}) = \nabla \times \mathbf{A}(\mathbf{r})$$

$$\mathbf{B}(\mathbf{r}) = \frac{\mu_0}{4\pi} \nabla \times \int d^3 r' \frac{\mathbf{J}(\mathbf{r}')}{|\mathbf{r} - \mathbf{r}'|}$$

$$\Rightarrow \mathbf{A}(\mathbf{r}) = \frac{\mu_0}{4\pi} \int d^3 r' \frac{\mathbf{J}(\mathbf{r}')}{|\mathbf{r} - \mathbf{r}'|} + \nabla s(\mathbf{r})$$

## Non uniqueness of the magnetostatic vector potential

Note that :  $\mathbf{B}(\mathbf{r}) = \nabla \times \mathbf{A}(\mathbf{r}) = \nabla \times \mathbf{A}'(\mathbf{r})$   
if  $\mathbf{A}'(\mathbf{r}) = \mathbf{A}(\mathbf{r}) + \nabla s(\mathbf{r})$

Example : for  $\mathbf{B}(\mathbf{r}) = B_0 \hat{\mathbf{z}}$

$$\mathbf{A}(\mathbf{r}) = \frac{1}{2} B_0 (x \hat{\mathbf{y}} - y \hat{\mathbf{x}})$$

or  $\mathbf{A}(\mathbf{r}) = B_0 x \hat{\mathbf{y}}$

or  $\mathbf{A}(\mathbf{r}) = -B_0 y \hat{\mathbf{x}}$

Differential form of Ampere's law in terms of vector potential:

$$\nabla \times \mathbf{B}(\mathbf{r}) = \nabla \times \nabla \times \mathbf{A}(\mathbf{r}) = \mu_0 \mathbf{J}(\mathbf{r})$$

$$\Rightarrow \nabla(\nabla \cdot \mathbf{A}(\mathbf{r})) - \nabla^2 \mathbf{A}(\mathbf{r}) = \mu_0 \mathbf{J}(\mathbf{r})$$

$$\text{If } \nabla \cdot \mathbf{A}(\mathbf{r}) = 0 \text{ (Coulomb gauge)} \Rightarrow \nabla^2 \mathbf{A}(\mathbf{r}) = -\mu_0 \mathbf{J}(\mathbf{r})$$

$$\mathbf{A}(\mathbf{r}) = \frac{\mu_0}{4\pi} \int d^3 r' \frac{\mathbf{J}(\mathbf{r}')}{|\mathbf{r} - \mathbf{r}'|}$$

Comment on determining  $\mathbf{A}(\mathbf{r})$  in the Coulomb gauge:

Differential form:  $\nabla^2 \mathbf{A}(\mathbf{r}) = -\mu_0 \mathbf{J}(\mathbf{r})$

Integral form:  $\mathbf{A}(\mathbf{r}) = \frac{\mu_0}{4\pi} \int d^3 r' \frac{\mathbf{J}(\mathbf{r}')}{|\mathbf{r} - \mathbf{r}'|}$

## PHY 712 -- Assignment #12

February 11, 2022

Start reading Chapter 5 in **Jackson** .

1. Consider an infinitely long cylindrical wire with radius  $a$ , oriented along the  $z$  axis. There is a steady uniform current inside the wire. Specifically, in terms of  $r$  the radial parameter of the cylindrical coordinates of the system the current density is  $\mathbf{J}(r) = \mathbf{J}_0$ , where  $\mathbf{J}_0$  is a constant vector along the  $z$ -axis, for  $r \leq a$  and zero otherwise.
  - a. Find the vector potential ( $\mathbf{A}$ ) for all  $r$ .
  - b. Find the magnetic flux field ( $\mathbf{B}$ ) for all  $r$ .

Integral form may not be a good idea in this case ---

# Further comments about HW #11


Using PHY 114 approach

$$\Rightarrow \nabla \cdot \mathbf{B}(\mathbf{r}) = 0$$

No magnetic monopoles

$$\Rightarrow \nabla \times \mathbf{B}(\mathbf{r}) = \mu_0 \mathbf{J}(\mathbf{r})$$

Ampere's law



Top view



Integral form:


$$\int d\mathbf{A} \cdot (\nabla \times \mathbf{B}) = \mu_0 \int d\mathbf{A} \cdot \mathbf{J}$$

$$\int d\ell \cdot \mathbf{B} = \mu_0 \int d\mathbf{A} \cdot \mathbf{J}$$

For this case:

$$2 \pi r B(r) = \mu_0 \pi r^2 J_0 \quad \text{for } r < a$$

# Magnetostatics example: current loop

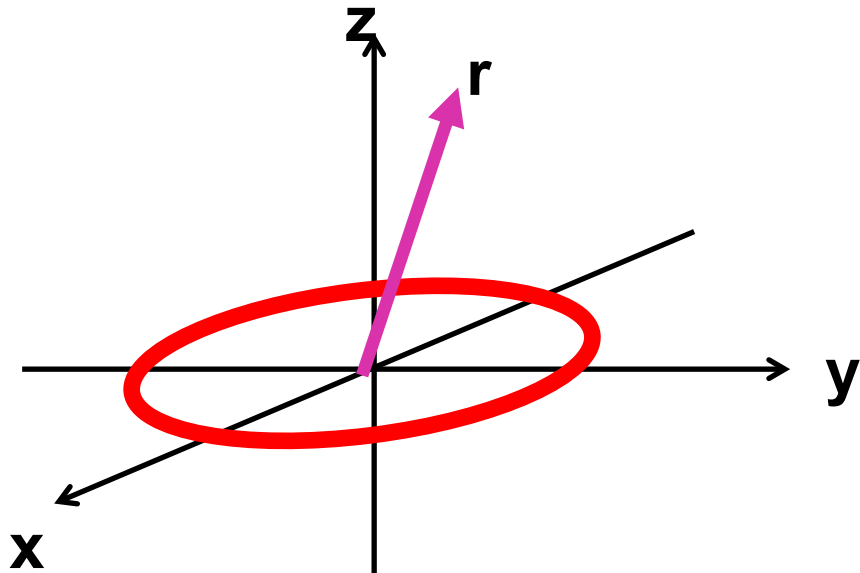

Integral form may be OK for this case...

$$\mathbf{J}(\mathbf{r}') = \frac{I}{a} \sin \theta' \delta(\cos \theta') \delta(r' - a) (-\sin \phi' \hat{\mathbf{x}} + \cos \phi' \hat{\mathbf{y}})$$

$$\mathbf{A}(\mathbf{r}) = \frac{\mu_0}{4\pi} \int d^3 r' \frac{\mathbf{J}(\mathbf{r}')}{|\mathbf{r} - \mathbf{r}'|}$$

# Magnetostatics example: current loop -- continued

$$\mathbf{J}(\mathbf{r}') = \frac{I}{a} \sin \theta' \delta(\cos \theta') \delta(r' - a) (-\sin \varphi' \hat{\mathbf{x}} + \cos \varphi' \hat{\mathbf{y}})$$

$$\mathbf{A}(\mathbf{r}) = \frac{\mu_0}{4\pi} \int d^3 r' \frac{\mathbf{J}(\mathbf{r}')}{|\mathbf{r} - \mathbf{r}'|}$$

$$\mathbf{A}(\mathbf{r}) = \frac{\mu_0 I}{4\pi a} \int r'^2 dr' d\cos \theta' d\varphi' \frac{\sin \theta' \delta(\cos \theta') \delta(r' - a) (-\sin \varphi' \hat{\mathbf{x}} + \cos \varphi' \hat{\mathbf{y}})}{(r^2 + r'^2 - 2rr'(\cos \theta \cos \theta' + \sin \theta \sin \theta' \cos(\varphi - \varphi')))^{1/2}}$$

Completing integration over  $r'$  and  $\theta'$ :

$$\mathbf{A}(\mathbf{r}) = \frac{\mu_0 I a^2}{4\pi a} \int_0^{2\pi} d\varphi' \frac{(-\sin \varphi' \hat{\mathbf{x}} + \cos \varphi' \hat{\mathbf{y}})}{(r^2 + a^2 - 2ra(\sin \theta \cos(\varphi - \varphi')))^{1/2}}$$


Let  $\varphi - \varphi' \equiv \phi$

$$\sin \varphi' = \sin(\varphi - \phi) = \sin \varphi \cos \phi - \cos \varphi \sin \phi$$

$$\cos \varphi' = \cos(\varphi - \phi) = \cos \varphi \cos \phi + \sin \varphi \sin \phi$$

Remaining non-trivial terms

$$\mathbf{A}(\mathbf{r}) = -\frac{\mu_0 I a}{4\pi} (\sin \varphi \hat{\mathbf{x}} - \cos \varphi \hat{\mathbf{y}}) \int_0^{2\pi} d\phi \frac{\cos \phi}{(r^2 + a^2 - 2ra(\sin \theta \cos \phi))^{1/2}}$$

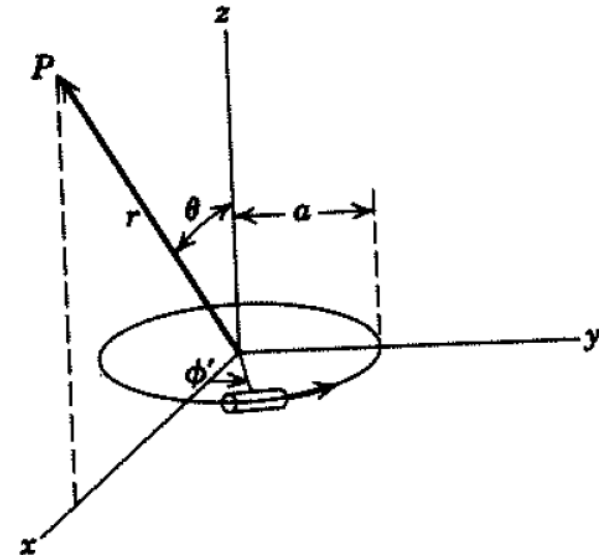

## Magnetostatics example: current loop -- continued

$$\mathbf{A}(\mathbf{r}) = -\frac{\mu_0 I a}{4\pi} (\sin \varphi \hat{\mathbf{x}} - \cos \varphi \hat{\mathbf{y}}) \int_0^{2\pi} d\phi \frac{\cos \phi}{\left(r^2 + a^2 - 2ra(\sin \theta \cos \phi)\right)^{1/2}}$$

Elliptic integrals:

$$K(m) = \int_0^{\pi/2} \frac{du}{\left(1 - m \sin^2 u\right)^{1/2}}$$

$$E(m) = \int_0^{\pi/2} \left(1 - m \sin^2 u\right)^{1/2} du$$


$$\mathbf{A}(\mathbf{r}) = -\frac{\mu_0}{4\pi} 4Ia \frac{(\sin \varphi \hat{\mathbf{x}} - \cos \varphi \hat{\mathbf{y}})}{\left(r^2 + a^2 + 2ra \sin \theta\right)^{1/2}} \left[ \frac{(2 - k^2)K(k) - 2E(k)}{k^2} \right]$$

where:  $k^2 \equiv \frac{4ar \sin \theta}{r^2 + a^2 + 2ra \sin \theta}$

$$\mathbf{B}(\mathbf{r}) = \nabla \times \mathbf{A}(\mathbf{r})$$



# Standard elliptic functions --

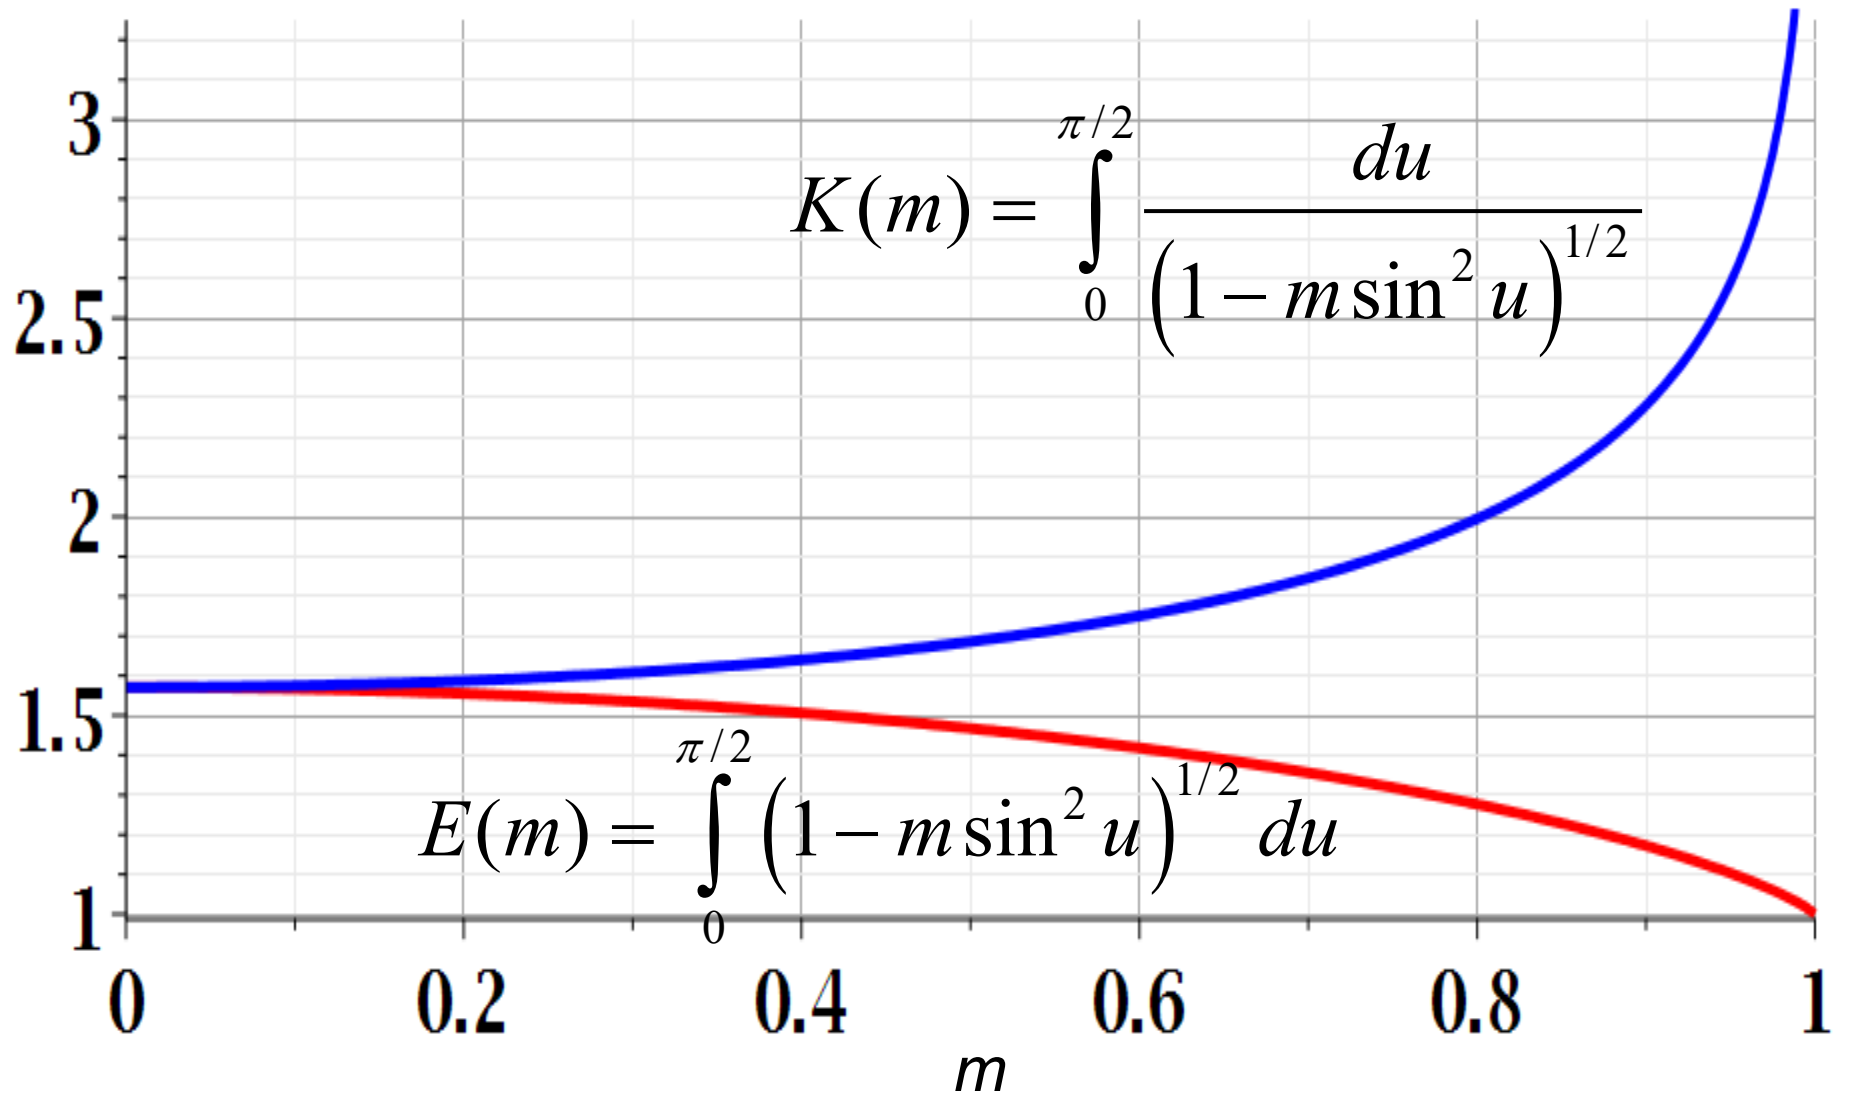

# Magnetostatics example: current loop -- continued

$$\mathbf{A}(\mathbf{r}) = -\frac{\mu_0}{4\pi} 4Ia \frac{(\sin\varphi \hat{\mathbf{x}} - \cos\varphi \hat{\mathbf{y}})}{(r^2 + a^2 + 2ra \sin\theta)^{1/2}} \left[ \frac{(2 - k^2)K(k) - 2E(k)}{k^2} \right]$$

where:  $k^2 \equiv \frac{4ar \sin\theta}{r^2 + a^2 + 2ra \sin\theta} = \frac{4ax}{x^2 + z^2 + a^2 + 2ax}$

For  $\varphi = 0$ :  $x = r \sin\theta$ ,  $y = 0$ ,  $z = r \cos\theta$

$$\mathbf{A}(\mathbf{r}) = A_y(x, z) \hat{\mathbf{y}} = \frac{\mu_0}{4\pi} 4Ia \hat{\mathbf{y}} \frac{1}{(x^2 + z^2 + a^2 + 2ax)^{1/2}} \left[ \frac{(2 - k^2)K(k) - 2E(k)}{k^2} \right]$$

where:  $k^2 \equiv \frac{4ax}{x^2 + z^2 + a^2 + 2ax}$

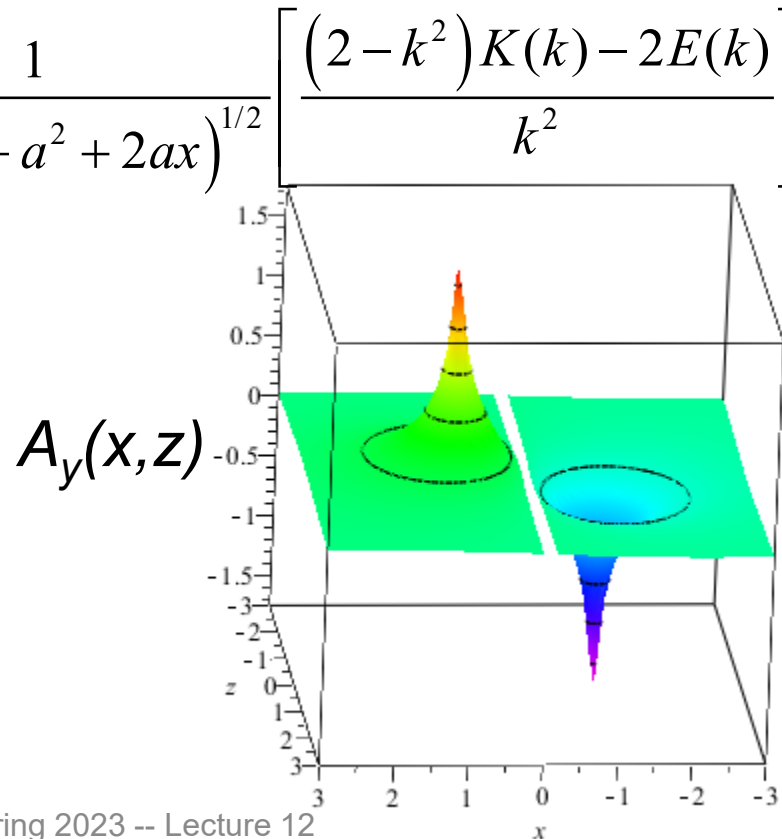
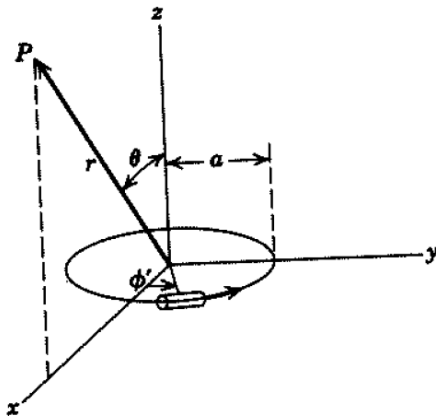


Figure 5.5

## Magnetostatics example: current loop -- continued

$$\begin{aligned}\mathbf{A}(\mathbf{r}) &= -\frac{\mu_0}{4\pi} 4Ia \frac{(\sin \varphi \hat{\mathbf{x}} - \cos \varphi \hat{\mathbf{y}})}{(r^2 + a^2 + 2ra \sin \theta)^{1/2}} \left[ \frac{(2 - k^2)K(k) - 2E(k)}{k^2} \right] \\ &= \hat{\boldsymbol{\phi}} \frac{\mu_0}{4\pi} \frac{4Ia}{(r^2 + a^2 + 2ra \sin \theta)^{1/2}} \left[ \frac{(2 - k^2)K(k) - 2E(k)}{k^2} \right]\end{aligned}$$

where:  $k^2 \equiv \frac{4ar \sin \theta}{r^2 + a^2 + 2ra \sin \theta}$

$$\mathbf{B} = \nabla \times \mathbf{A} = \frac{1}{r \sin \theta} \frac{\partial}{\partial \theta} (r \sin \theta A_\phi(r, \theta)) \hat{\mathbf{r}} - \frac{1}{r} \frac{\partial (r A_\phi(r, \theta))}{\partial r} \hat{\boldsymbol{\theta}}$$

## Evaluation for special cases

For  $k^2 \rightarrow 0$ :

$$\frac{(2 - k^2)K(k) - 2E(k)}{k^2} \approx \frac{\pi}{16} k^2$$

## Evaluation for special case $k^2 \rightarrow 0$

$$\mathbf{A}(\mathbf{r}) = \hat{\boldsymbol{\phi}} \frac{\mu_0 I a^2}{4} \frac{r \sin \theta}{(r^2 + a^2 + 2ra \sin \theta)^{3/2}}$$

$$\begin{aligned} \mathbf{B} = \nabla \times \mathbf{A} &= \frac{1}{r \sin \theta} \frac{\partial}{\partial \theta} (r \sin \theta A_\phi(r, \theta)) \hat{\mathbf{r}} - \frac{1}{r} \frac{\partial (r A_\phi(r, \theta))}{\partial r} \hat{\boldsymbol{\theta}} \\ &= \frac{\mu_0 I a^2}{4} \frac{(\hat{\mathbf{r}} \cos \theta (2a^2 + 2r^2 + ar \sin \theta) - \hat{\boldsymbol{\theta}} \sin \theta (2a^2 - r^2 + ar \sin \theta))}{(r^2 + a^2 + 2ra \sin \theta)^{5/2}} \end{aligned}$$

$$\text{where } k^2 \equiv \frac{4ar \sin \theta}{r^2 + a^2 + 2ra \sin \theta} \rightarrow 0$$

For  $\theta = 0$ :  $r = z$

$$\begin{aligned} \mathbf{B} = \nabla \times \mathbf{A} &= \frac{1}{r \sin \theta} \frac{\partial}{\partial \theta} (r \sin \theta A_\phi(r, \theta)) \hat{\mathbf{r}} - \frac{1}{r} \frac{\partial (r A_\phi(r, \theta))}{\partial r} \hat{\boldsymbol{\theta}} \\ &= \hat{\mathbf{z}} \frac{\mu_0 I a^2}{2} \frac{1}{(z^2 + a^2)^{3/2}} \end{aligned}$$

## Evaluation for special case $k^2 \rightarrow 0$

$$\mathbf{A}(\mathbf{r}) = \hat{\boldsymbol{\phi}} \frac{\mu_0 I a^2}{4} \frac{r \sin \theta}{(r^2 + a^2 + 2ra \sin \theta)^{3/2}}$$

$$\begin{aligned} \mathbf{B} &= \nabla \times \mathbf{A} = \frac{1}{r \sin \theta} \frac{\partial}{\partial \theta} (r \sin \theta A_\phi(r, \theta)) \hat{\mathbf{r}} - \frac{1}{r} \frac{\partial (r A_\phi(r, \theta))}{\partial r} \hat{\boldsymbol{\theta}} \\ &= \frac{\mu_0 I a^2}{4} \frac{(\hat{\mathbf{r}} \cos \theta (2a^2 + 2r^2 + ar \sin \theta) - \hat{\boldsymbol{\theta}} \sin \theta (2a^2 - r^2 + ar \sin \theta))}{(r^2 + a^2 + 2ra \sin \theta)^{5/2}} \end{aligned}$$

$$\text{where } k^2 \equiv \frac{4ar \sin \theta}{r^2 + a^2 + 2ra \sin \theta} \rightarrow 0$$

For  $r \rightarrow \infty$

$$\begin{aligned} \mathbf{B} &= \nabla \times \mathbf{A} = \frac{1}{r \sin \theta} \frac{\partial}{\partial \theta} (r \sin \theta A_\phi(r, \theta)) \hat{\mathbf{r}} - \frac{1}{r} \frac{\partial (r A_\phi(r, \theta))}{\partial r} \hat{\boldsymbol{\theta}} \\ &= \frac{\mu_0 I a^2}{4r^3} (\hat{\mathbf{r}} (2 \cos \theta) + \hat{\boldsymbol{\theta}} \sin \theta) \end{aligned}$$

# Magnetostatics example: current loop -- continued

$$\mathbf{A}(\mathbf{r}) = \frac{\mu_0}{4\pi} 4Ia \frac{(\sin \phi \hat{\mathbf{x}} - \cos \phi \hat{\mathbf{y}})}{(r^2 + a^2 + 2ra \sin \theta)^{1/2}} \left[ \frac{(2 - k^2)K(k) - 2E(k)}{k^2} \right]$$

where:  $k \equiv \frac{4ar \sin \theta}{r^2 + a^2 + 2ra \sin \theta}$

$$\mathbf{B}(\mathbf{r}) = \nabla \times \mathbf{A}(\mathbf{r})$$

Note that for spherical polar coordinates:  $\hat{\phi} = \sin \phi \hat{\mathbf{x}} - \cos \phi \hat{\mathbf{y}}$

$$\mathbf{A}(\mathbf{r}) = A_\phi(\mathbf{r}) \hat{\phi}$$

where  $A_\phi(\mathbf{r}) = \frac{\mu_0}{4\pi} \frac{4Ia}{(r^2 + a^2 + 2ra \sin \theta)^{1/2}} \left[ \frac{(2 - k^2)K(k) - 2E(k)}{k^2} \right]$

$$\mathbf{B}(\mathbf{r}) = \frac{1}{r \sin \theta} \frac{\partial(\sin \theta A_\phi(\mathbf{r}))}{\partial \theta} \hat{\mathbf{r}} - \frac{1}{r} \frac{\partial(r A_\phi(\mathbf{r}))}{\partial r} \hat{\theta}$$

For  $r \rightarrow \infty$ :

$$\mathbf{B}(\mathbf{r}) \approx \frac{\mu_0}{4\pi} \frac{I\pi a^2}{r^3} (2 \cos \theta \hat{\mathbf{r}} + \sin \theta \hat{\theta})$$

## Other examples of current density sources:

Quantum mechanical expression for current density

for a particle of mass  $M$  and charge  $e$  and of probability amplitude  $\Psi(\mathbf{r})$ :

$$\mathbf{J}(\mathbf{r}) = -\frac{e\hbar}{2Mi} \left( \Psi^*(\mathbf{r}) \nabla \Psi(\mathbf{r}) - \Psi(\mathbf{r}) \nabla \Psi^*(\mathbf{r}) \right)$$

For an electron in a spherical potential (such as in an atom):

$$\Psi(\mathbf{r}) \equiv \Psi_{nlm_l}(\mathbf{r}) = R_{nl}(r) Y_{lm_l}(\hat{\mathbf{r}})$$

$$\begin{aligned} \mathbf{J}(\mathbf{r}) &= \frac{e\hbar}{2Mi} |R_{nl}(r)|^2 \frac{1}{r \sin \theta} \left( Y_{lm_l}^*(\hat{\mathbf{r}}) \frac{\partial Y_{lm_l}(\hat{\mathbf{r}})}{\partial \phi} - Y_{lm_l}(\hat{\mathbf{r}}) \frac{\partial Y_{lm_l}^*(\hat{\mathbf{r}})}{\partial \phi} \right) \hat{\phi} \\ &= \frac{e\hbar}{M} \frac{m_l}{r \sin \theta} |\Psi_{nlm_l}(\mathbf{r})|^2 \hat{\phi} \end{aligned}$$

Note that:  $\hat{\phi} = -\sin \phi \hat{\mathbf{x}} + \cos \phi \hat{\mathbf{y}} = \frac{\hat{\mathbf{z}} \times \mathbf{r}}{r \sin \theta}$

$$\mathbf{J}(\mathbf{r}) = \frac{e\hbar}{M} \frac{m_l}{r^2 \sin^2 \theta} |\Psi_{nlm_l}(\mathbf{r})|^2 (\hat{\mathbf{z}} \times \mathbf{r})$$

Magnetic vector potential for this case:

$$\mathbf{A}(\mathbf{r}) = \frac{\mu_0}{4\pi} \int d^3 r' \frac{\mathbf{J}(\mathbf{r}')}{|\mathbf{r} - \mathbf{r}'|}$$

$$\mathbf{J}(\mathbf{r}') = \frac{e\hbar}{M} \frac{m_l}{r'^2 \sin^2 \theta'} \left| \Psi_{nlm_l}(\mathbf{r}') \right|^2 (\hat{\mathbf{z}} \times \mathbf{r}')$$

$$\mathbf{A}(\mathbf{r}) = \frac{\mu_0}{4\pi} \frac{e\hbar m_l}{M} \int d^3 r' \frac{(\hat{\mathbf{z}} \times \mathbf{r}') \left| \Psi_{nlm_l}(\mathbf{r}') \right|^2}{|\mathbf{r} - \mathbf{r}'| r'^2 \sin^2 \theta'}$$

For example: electron in the  $nlm_l = 211$  state of H:

$$\left| \Psi_{211}(\mathbf{r}') \right|^2 = \frac{1}{64\pi a^3} \left( \frac{r'}{a} \right)^2 e^{-r'/a} \sin^2 \theta'$$

$$\mathbf{A}(\mathbf{r}) = -\frac{\mu_0}{8\pi} \frac{e\hbar}{M} \frac{(\hat{\mathbf{z}} \times \mathbf{r})}{r^3} \left[ 1 - e^{-r/a} \left( 1 + \frac{r}{a} + \frac{r^2}{2a^2} + \frac{r^3}{8a^3} \right) \right]$$



Some details -- (note – this case simplifies more quickly than most...)

$$\mathbf{A}(\mathbf{r}) = \frac{\mu_0}{4\pi} \frac{e\hbar m_l}{M} \int d^3 r' \frac{(\hat{\mathbf{z}} \times \mathbf{r}')}{|\mathbf{r} - \mathbf{r}'|} \frac{|\Psi_{nlm_l}(\mathbf{r}')|^2}{r'^2 \sin^2 \theta'}$$

$$|\Psi_{211}(\mathbf{r}')|^2 = \frac{1}{64\pi a^3} \left(\frac{r'}{a}\right)^2 e^{-r'/a} \sin^2 \theta'$$

$$\mathbf{A}(\mathbf{r}) = \frac{\mu_0}{4\pi} \frac{1}{64\pi a^3} \frac{e\hbar m_l}{M} \hat{\mathbf{z}} \times \int r' dr' d\Omega' \frac{\hat{\mathbf{r}}'}{|\mathbf{r} - \mathbf{r}'|} \left(\frac{r'}{a}\right)^2 e^{-r'/a}$$

$$\mathbf{A}(\mathbf{r}) = -\frac{\mu_0}{8\pi} \frac{e\hbar}{M} \frac{(\hat{\mathbf{z}} \times \mathbf{r})}{r^3} \left[ 1 - e^{-r/a} \left( 1 + \frac{r}{a} + \frac{r^2}{2a^2} + \frac{r^3}{8a^3} \right) \right]$$